

YUEDU Shredders Product Catalog

Documents · Metals · Plastics · Composites · Shredding Systems
Empowering Global Industries with Shredding Solutions.



 YUEDU Shredders Product Catalog	1
 产品中心 (Product Center)	7
 1. 大型办公系列 (Large Office Series)	7
 Product Center	9
 1. Large Office Series	9
 2. 工业碎纸系列 (Industrial Shredder Series)	36
 3. FSJ 高速刀系列 (FSJ High-Speed Cutter Series)	53
 4. Twin-Shaft Shredder Series	69
 4. 双轴撕碎机系列 (Twin-Shaft Shredder Series)	69
 6. 粉碎系统 (Shredding System Solutions)	85
 6. Shredding System Solutions	85
7. Honeycomb Paper Expander Series	104
7. 膨切机产品线 (Honeycomb Paper Expander Series)	104

Global Shredding Solutions

Quality Assurance and Certifications



Shanghai YUEDU Technology Co., Ltd. is a **Shanghai-certified high-tech enterprise** specializing in the development and manufacturing of **shredding and destruction equipment**. We serve a wide range of sectors including **government agencies, financial institutions, military departments, enterprises, and recycling industries**.

Our offerings include **office and industrial-grade paper shredders**, **hard drive destroyers**, **plastic crushing systems**, and fully **customized** destruction center **solutions**. From design to delivery, we help clients achieve efficient, secure, and compliant material destruction.

Our Mission

We are dedicated to the shredding and destruction industry, continuously solving diverse material shredding and disposal challenges for our clients around the world.

Our Core Values

-  Aligned with **Buffett and Munger**
-  **User-Centric Operations**
-  **Commitment to Long-Termism**

-  **Integrity First**
-  **Common Sense & Customer Value**

Book / Paper / Hard Drive Shredding Effectiveness



1*1mm Powder Form



2*15mm



4*40mm



10*10mm



5*5mm Cellulose



3mmCrepe Paper Strips



Fibrous Paper Powder



Mesh Corrugated
Cardboard Box



Server Hard Drive Shredding



1cm Hard Drive Particles








Card Shredding to 4mm
Particles



CD/DVD Shredding to
4mm Particles

Planning, Design, Manufacturing, Testing,
Debugging, Packaging, Shipping



 **YUEDU Shredders Product Catalog 1**

Documents · Metals · Plastics · Composites · Shredding Systems1

Empowering Global Industries with Shredding Solutions.1

Planning, Design, Manufacturing, Testing, Debugging, Packaging, Shipping3

Quality Assurance and2

Third-Party Certifications.....2

 **产品中心 (Product Center) 7**

 **1. 大型办公系列 (Large Office Series) 7**

 **大功率办公碎纸机 (High-Power Office Shredders)8**

 **Product Center 9**

 **1. Large Office Series 9**

 **High-Power Office Shredders10**

 YD-23026 | ¥2870 元..... 12

 YD-23026 | \$ USD 405 13

 YD-310CC / YD-418CC / YD-428CC..... 16

 越都 YD-310CC26 机型 31

 越都 YD-338CC 系列机型 17

 YD-338CC Series 18

 **高保密等级碎纸机 High-Security Certified Shredders.....32**

 **High-Security Certified Shredders.....29**

 YD-2405M..... 33

 YD-2315 34

 YD-BM3115..... 35

 **双入口漏斗式碎纸机 (Dual-Entry Funnel Shredders)19**

 **Dual-Entry Funnel Shredders19**

 **YD-400CC-HD 和 YD-458CC-HD 29**

 YD-448CCM 高性能保密碎纸机 20

 YD-448CCM Mid-Security Office Shredder 21

 YD-PSJ300ES 简款 22

 YD-PSJ300ES 23

 **YD-PSJ300 系列..... 24**

 **YD-PSJ300 Series 25**

YD-PSJ250ES2 设备详情图	27
YD-PSJ250ES3 碎纸机	28
2. 工业碎纸系列 (Industrial Shredder Series)	29
重型碎纸机 YD-PSJ350 机型 (350M2 机型)	38
YD-PSJ3500 / 350M2 / 350M1	39
越都 YD-PSJ500 (3P7.5KW) 机型	40
越都 YD-468CC-HD 机型 产品参数	41
输送带入口 (皮带进料) Conveyor Belt Inlet (Belt Feeding System)	43
32820 样机系列(展厅现货)	51
YD-428ACC-HD 机型	43
YD-428130	45
YD-500CC2024 碎纸机 (500 张)	46
YD-500CC2024 (500 pages)	47
越都 YD-5002 碎纸打包一体机 (500 张)	48
YD-5002 Book Shredding & Baling Systems	49
YD-500 机型 270~600 系列参数对比表	50
3. FSJ 高速刀系列 (FSJ High-Speed Cutter Series)	51
PC 片刀系列 (PC Series)	53
PC-B 系列 塑料粉碎机 Plastic crusher	55
越都 YD-FSJPC300 机型 产品性能介绍 和 主要参数	56
图 1: 整机图	56
图 2: 纸团粉碎	56
图 3: 财务凭证粉碎	56
QL 强力系列 (QL Series)	56
YD-FSJQL 系列 300-800 型漏斗大功率机型	57
GD 滚刀系列 GD Series (Belt Feeding System)	59
YD-GD370 Series Parameter Comparison Table Strip-Cut Shredding Performance 定制 YD-GD370 系列参数对比表 切条切断效果	59
YD-GD800 机型 条状效果	61
SL 静音型强力系列 (SL Silent Power Series)	62
YD-SL500 600 700 静音型大功率书本粉碎机	63
YD-SL500 600 700 Silent High-Power Book Shredder	64
SL 静音型大入口系列 (Wide Feed Series)	65
YD-SL Series 3040-60120 Silent Shredder Industry Solutions: Confidential Destruction + Packaging Printing	66
YD-SL60120 1.2 米入口展板粉碎机	67
定制系列 Custom Cutter Series	68
4. 双轴撕碎机系列 (Twin-Shaft Shredder Series)	69
4. Twin-Shaft Shredder Series	69

YD-SSJ Series	70
硬盘粉碎机 Hard Drive Shredders /products/data-destruction/hard-drive.....	71
存储芯片粉碎机 Storage Chip Shredders /products/data-destruction/chip.....	71
大型硬盘粉碎销毁机 YD-YP200JM 连续销毁整个硬盘.....	74
越都 品牌 多功能存储介质销毁机 XG450	75
消磁机 Degaussers /products/data-destruction/degausser	76
越都硬盘消磁机 YD-XCJ01 型磁性存储介质信息清除机消磁销毁设备 消磁速度快 适用保密局政府部队.....	76
越都磁性存储介质消磁机 YD-XCJ05	78
瑞翔消磁粉碎一体机 RX-DIC818	81
6. 粉碎系统 (Shredding System Solutions)	85
书本粉碎打包一体机	85
6. Shredding System Solutions	85
Book Shredding & Baling Systems.....	85
4001 和 5001	87
YD-5002	88
货币粉碎压块一体机	89
Banknote Shredding & Compaction Systems	89
YD-BM3002P-9075 Banknote Destruction Machine	90
YKJ90-75 YKJ90-250 Compactor	91
三合一粉碎系统: 1mm 粉碎+硬盘销毁+消磁 一体机	92
Three-in-One Secure Destruction Systems (1mm Shredding + Hard Drive Crushing + Degaussing)	92
YD-PZ 系列 三合一保密销毁系统	93
YD-PZ Series Three-in-One Secure Destruction System	94
1mm 粉末状销毁系统 1mm Ultra-Fine Powder Destruction Systems.....	95
YD-YTJ600BM1 系列选型表	98
YD-YTJ600BM1 500 400 300.....	99
YD-BM4001.....	100
YD-BM6002.....	101
YD-BM6002P 粉碎系统.....	102
YD-BM6002P Integrated Shredding System	103
7. Honeycomb Paper Expander Series.....	104
7. 膨切机产品线 (Honeycomb Paper Expander Series)	104
YD-PQJ500W YD-PQJ425W YD-PQJ325W YD-PQJ320W	105
YD-PQJ500W inc. vacuum cleaner.....	106
YD-PQJFW500 High-speed honeycomb paperboard die-cutting machine	107

1. 大型办公系列 (Large Office Series)

适用于有单相电的办公区域，日常批量文档粉碎，常用于单位/企业办公场所

大型办公系列的碎纸机，主要交付参数如下：

 ID型号	热销型号一览，满足不同使用场景 代表型号：YD-23026C、YD-3120C、YD-310CC、YD-418CC、YD-338CC-HD、YD-448CC、YD-PSJ300ES、YD-PSJ300
 进纸宽度	多种进纸宽度，兼顾办公与特殊需求 最大定制尺寸：900mm 常用尺寸：240mm / 310mm / 400mm / 460mm / 500mm / 600mm
 碎后尺寸	可选粉碎尺寸，从日常处理到高密级保密 最小粉碎规格：0.6×2.9mm / 0.7×3.5mm / 1×1mm（粉末级） 常见规格：1×5cm、5.8×50mm、4×40mm、2×15mm、1×10mm
 碎纸能力	满足从轻量办公到大批量处理的碎纸任务 最大处理能力：一次性 60–100 张 常见配置：25 / 35 / 45 张（70g A4 纸）
 重量	涵盖轻便款与工业初级设备 常见重量范围：15kg ~ 250kg
 额定功率	强劲动力输出，满足不同负载工况 常见功率范围：580W ~ 2.6KW 最大功率：3KW
 外形(mm)	机身尺寸灵活，可按场地量身定制 常见外形紧凑，适合办公楼电梯与门口尺寸 支持定制特殊尺寸，提供工程图确认
 废纸箱(升)	大容量收集箱，减少频繁清理 常见规格：50L / 120L / 150L / 160L 也可按需定制更大容积
 价格(¥)	灵活价格覆盖办公与专业用户 常见售价区间：¥1,500 ~ ¥50,000 欢迎咨询获取具体报价及批量优惠

量产刀具展示

展示常州蓝米的EXCEL刀具图片和简要参数

大功率办公碎纸机 (High-Power Office Shredders)

【概览】 适用于大型办公室、行政部门和企业环境，支持长时间连续工作，满足高负荷、高效率的文档销毁需求。

【代表型号】： YD-23026、YD-3120、YD-418CC、YD-428CC、YD-310CC26、YD-338CC

1. Large Office Series

Suitable for single-phase power environments, ideal for daily bulk document shredding in office and corporate settings.

The main specifications of our large office series shredders are as follows:

 Model	<i>Top-Selling Models for Various Application Scenarios</i> <i>Featured Models: YD-23026C, YD-3120C, YD-310CC, YD-418CC, YD-338CC-HD, YD-448CC, YD-PSJ300ES, YD-PSJ300</i>
 Feed Width (mm)	Various Feed Width Options for Office and Industrial Use Maximum Custom Size: 900mm Common Sizes: 240mm / 310mm / 400mm / 460mm / 500mm / 600mm
 Cut Size	Customizable Output Size – From Office Use to High-Security Destruction Minimum Particle Size: 0.6×2.9mm / 0.7×3.5mm / 1×1mm (powder-grade) Common Sizes: 1×5cm, 5.8×50mm, 4×40mm, 2×15mm, 1×10mm
 Max Sheets	Handles Light to Heavy Shredding Workloads Efficiently Max Capacity: 60–100 sheets per pass Typical Capacity: 25 / 35 / 45 sheets (70g A4 paper)
 Weight (kg)	Covers Lightweight Units to Entry-Level Industrial Machines Typical Weight Range: 15kg – 250kg
 Power	High-Performance Power Output for Various Operational Demands Typical Power Range: 580W – 2.6KW Maximum Power: 3KW
 L×W×H (mm)	Flexible Body Size – Customizable to Fit On-Site Requirements Compact sizes suitable for office doors and elevators Custom dimensions available with engineering drawings provided
 Bin(L)	Large Waste Bin – Reduces Cleaning Frequency Standard Capacities: 50L / 120L / 150L / 160L Optional larger volumes available upon request
 Price (USD)	Flexible Pricing – Covers Office to Professional Applications Typical Price Range: ¥1,500 – ¥50,000 Please contact us for exact quotations and volume discounts

量产刀具展示

展示常州蓝米的EXCEL刀具图片和简要参数

High-Power Office Shredders

Overview

Designed for high-volume document destruction in corporate and administrative environments.

Featured Models

YD-23026, YD-3120, YD-418CC, YD-428CC, YD-310CC26, YD-338CC

Quick Selection 快速选型

 Front View

 Feeding Inlet

 Model

 YouTube

 Features

 Price USD

High-Power Office Shredders

		YD-23026C YD-23026M YD-23026M2		415 439 475
		YD-3120S YD-3120C YD-3120M YD-M2405	 120L	991 1398 1668 245
		YD-310CC YD-310CCM	 150L	2688 2829
		YD-418CC YD-428CC	 42cm	4020 5395

Dual-Entry Funnel Shredders

		YD-338CC26 YD-338CC-HD YD-338CCM		5713 7110 7140
		YD-448CC YD-448CCM	 Feed 44cm	9715 11828
		YD-PSJ300ES	 hard drives, PCBs, paper- bound files.	2853
		YD-PSJ300-2P YD-PSJ300-3P	 160L	5715 8378

YD-23026 | ¥2870 元

产品概览 Product Overview

图 1：整机外观图



图 2：纸张进料图



图 3：机器内部 开门状态



核心优势 Key Features

连续 60 分钟不停机 每小时碎纸 6000 张 (22 公斤)

应用场景 Application Scenarios

Offices Banks Finance Archives Executives

可以粉碎的物品 Shreddable Materials

A4 Paper Magazines Cards CDs/DVDs Receipts

主要参数 Technical Specifications

ID型号	YD-23026C	YD-23026M	YD-23026M2
进纸宽度	240mm	240mm	240mm
碎后尺寸	3.9*38mm	2*15mm	2*10mm
碎纸能力	25-32 张	15 张	18 张
重量	30kg	30kg	30kg
额定功率	580W	600W	600W
外形(mm)	430*330*710	430*330*710	430*330*710
废纸箱(升)	50L	50L	50L
价格(¥)	2870	3072	3299

图 4：机器入口面板图
(智能操作面板，动态显示负载)



YD-23026 | \$ USD 415/

Product Overview

Fig. 1: Full View



Fig. 2: Feeding View



Fig. 3: Internal View



Key Features

- Continuous operation for 60 minutes
- Up to 6,000 sheets/hour (22 kg)

Application Scenarios

Offices Banks Finance Archives Executives

Shreddable Materials

A4 Paper Magazines Cards CDs/DVDs Receipts

Technical Specifications:

ID Model	YD-23026C	YD-23026M	YD-23026M2	Fig. 4: Control Panel View (Panel with dynamic load display) 
Feed Width (mm)	240mm	240mm	240mm	
Cut Size	3.9*38mm	2*15mm	2*10mm	
Max Sheets	25-32	15	18	
Weight (kg)	30kg	30kg	30kg	
Power	580W	600W	600W	
L×W×H (mm)	430*330*710	430*330*710	430*330*710	
Bin(L)	50L	50L	50L	
Price (USD)	415	439	475	

3120/2760/M2405

产品概览 Product Overview

Fig. 1: Full View




Fig. 2: Feeding View



Fig. 3: Internal View



Fig. 4: Control Panel View (Panel with dynamic load display)

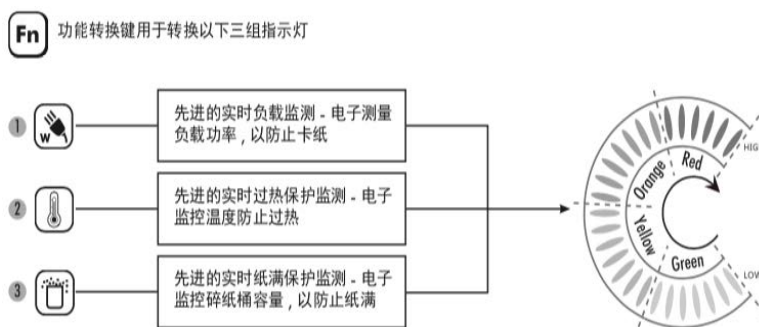

✓ 核心优势 Key Features

- Continuous operation
- 120L BIN

🔧 主要参数 Technical Specifications

ID型号	YD-2760	YD-3120S	YD-3120C	YD-3120M	YD-M2405
进纸宽度	270mm	310mm	310mm	310mm	220mm
碎后尺寸	3.8*38mm	3.8mm or 5.8mm	3.8*38mm	2*8mm	1*2mm
碎纸能力	20-25	26-32 (or 40)	20-25	15-18	4-5
重量	45kg	45kg	45kg	45kg	45kg
额定功率	900W	900W	900W	900W	480W
连续工作	连续	连续	连续	连续	60min
外形(mm)	480*396*706mm	532*465*910mm	532*465*910mm	532*465*910mm	470*396*706mm
废纸箱(升)	62L	120L	120L	120L	60L
价格(¥)	5775 元	6937 元	9775 元	11670 元	4500 元

YD-3120C / M2405 / YD-2760

Product Overview

Fig. 1: Full View




Fig. 2: Feeding View



Fig. 3: Internal View



Fig. 4: Control Panel View (Panel with dynamic load display)

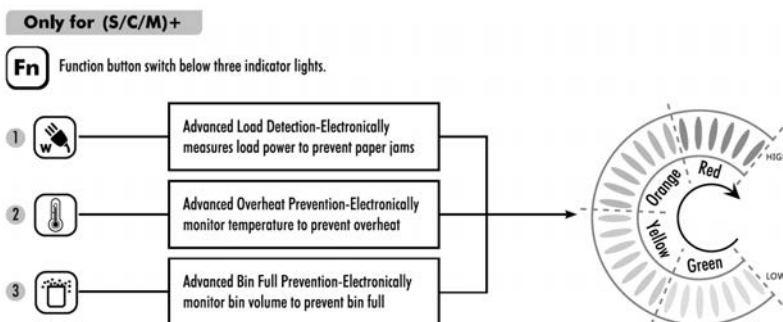

Key Features

- Continuous operation
- 120L BIN

Technical Specifications:

ID Model	YD-2760	YD-3120S	YD-3120C	YD-3120M	YD-M2405
Feed Width (mm)	270mm	310mm	310mm	310mm	220mm
Cut Size	3.8*38mm	3.8mm or 5.8mm	3.8*38mm	2*8mm	1*2mm
Max Sheets	20-25	26-32 (or 40)	20-25	15-18	4-5
Weight (kg)	45kg	45kg	45kg	45kg	45kg
Power	900W	900W	900W	900W	480W
Continuous	Yes	Yes	Yes	Yes	60min
L×W×H (mm)	480*396*706	532*465*910	532*465*910	532*465*910	470*396*706
Bin(L)	62L	120L	120L	120L	60L
Price (USD)	825	991	1397	1668	645

YD-310CC / YD-418CC / YD-428CC

Product Overview

Fig. 1: Full View



Fig. 2: Feeding View



Fig. 3: Internal View



Key Features

- Continuous operation over 3 hours
- 150L BIN

Technical Specifications:

MODEL	YD-310CC	YD-310CCM	YD-418CC	YD-428CC
FEED WIDTH	310mm	310mm	418mm	428mm
CUT SIZE	3.8*39mm	1.9*15mm	3.8*39mm	5.8*45mm
MAX SHEETS	25-35	16-20	25-32	55-65
WEIGHT	93kg	95kg	97kg	110kg
POWER	1.2KW	1.2KW	1.3KW	2KW
CONTINUOUS	3 hours	3 hours	3 hours	Continuous
L×W×H (MM)	620*480*1070mm	620*480*1070mm	620*480*1070mm	800*650*1150mm
BIN(L)	150L	150L	150L	260L
PRICE (RMB)	18800	19800	28140	37750
PRICE (USD)	2688	2829	4020	5395

图 4 YD-418CC 机型碎图纸



图 5 YD-428CC 整机图



越都 YD-338CC 系列

产品概览 Product Overview

图 1：整机正面图



图 2：双入口进料



图 3：刀具自润滑



图 4：（一体钢刀 保用 10 年）



可以粉碎的物品 Shreddable Materials

A4 Paper Magazines Cards CDs/DVDs Receipts

主要参数 Technical Specifications:

ID 型号	YD-338CC26-HD	YD-338CC40-HD	YD-338CC-HD	YD-338CCM
入口宽度	平铺进口平台宽 600mm，漏斗式入口宽 330mm			
粉碎效果	3.8*35mm 粒状	3.8*38mm 粒状	3.8*38mm 粒状	1.8*15mm
粉碎能力	26-38 张（70g）	40 – 48 张（70g）	50 - 60 张（70g）	25-35 张（70g）
机器净重	120kg			
额定功率	1.5KW	1.8KW	2.0KW	1.8kw
外形尺寸	600*492*1204mm			
纸箱容量	130L			
碎纸量	789 公斤	900 公斤	1200 公斤	750 公斤
碎卡量	60000 张	50000 张	65000 张	35000 张
碎光盘	100000 张	120000 张	150000 张	75000 张
价格	39997 元	43875 元	49770 元	49975 元

YD-338CC Series

Product Overview

Fig. 1: Full View



Fig. 2: Feeding View



Fig. 3: Self-Lubricating Blades



Fig. 4: Integrated Steel Cutter – 10-Year Warranty



Shreddable Materials

A4 Paper Magazines Cards CDs/DVDs Receipts

Technical Specifications:

Model	YD-338CC26-HD	YD-338CC40-HD	YD-338CC-HD	YD-338CCM
Feed Width (mm)	Flat feed platform width: 600 mm, hopper-style inlet width: 330 mm			
Cut Size	3.8*35mm	3.8*38mm	3.8*38mm	1.8*15mm
Max Sheets	26-38(70g A4)	40-48(70g A4)	50-60(70g A4)	25-35(70g A4)
Weight (kg)	120kg			
Power	1.5KW	1.8KW	2.0KW	1.8kw
L×W×H (mm)	600*492*1204mm			
Bin(L)	130L			
Paper Capacity	789kg	900kg	1200kg	750kg
Card Capacity	60000 sheets	50000 sheets	65000 sheets	35000 sheets
Disc Capacity	100000 sheets	120000 sheets	150000 sheets	75000 sheets
Price (USD)	5713	6268	7110	7140

Dual-Entry Funnel Shredders

Overview

Featuring funnel-type dual feed design for handling large quantities of mixed media and bulky materials.

Featured Models

YD-400CC-HD, YD-458CC-HD, YD-448CCM, YD-PSJ300ES, YD-PSJ250ES2, YD-PSJ250ES3

双入口漏斗式碎纸机 (Dual-Entry Funnel Shredders)

【概览】 采用漏斗式大容量双入口设计，便于快速批量进料，适合处理纸张、光盘、文件夹等多种介质。

【代表型号】：YD-400CC-HD、YD-458CC-HD、YD-448CCM、YD-PSJ300ES、YD-PSJ250ES2、YD-PSJ250ES3

YD-448CCM 高性能保密碎纸机

产品概览 Product Overview



产品亮点:

- ◆ 双入口操作 | 提升效率

 - 主入口：顶部掀盖式大入口，适合批量投入书本、合同等整本资料
 - 辅入口：前平台式开槽入口，日常文件即插即碎，操作更便捷
- ◆ 中颗粒微切 | 保密高效兼得

 - 碎纸尺寸：2×15mm
 - 可碎 40–60 张，一次性处理中等厚度资料
 - 满足欧盟 5-6 级保密标准
- ◆ 强大核心 + 节能静音

 - 2.2KW 工业电机，连续运行 3 小时+
 - 噪音等级仅 55dB，适配安静办公环境
- ◆ 160L 超大纸屑箱

 - 配备加厚蓝色储屑桶，减少频繁清理
 - 推拉式开门设计，清倒方便安全
- ◆ 适用场景广泛

 - 保密室、涉密单位、金融总部首选
 - 可灵活部署在多数办公场所

行业领军者的首选

广泛应用于各类单位的信息安全销毁需求，是众多世界 500 强企业优先采购的保密销毁设备。

产品参数:

ID 型号	YD-448CC	YD-448CCM
入口宽度	448mm	448mm
粉碎效果	3.9*45mm	1.9*15mm
粉碎张数	50-70	40-60 (70g, A4)
机器净重	258kg	258kg
额定功率	2.2KW	2.2KW
外形尺寸	1322*877*790mm	1322*877*790mm
纸箱容量	160L	160L
价格	68971 元	83975 元

YD-448CCM Mid-Security Office Shredder

 Dual-Feed Shredder with Large Bin – Built for Office Efficiency & Security

Product Overview



Front View



Right Side View



Safe Feeding Inlet



Fully Enclosed Waste Bin

✦ Highlights:

◆ Dual Input Design

Top Cover Inlet: for bulk-bound reports & thick documents

Front Slot Inlet: for everyday papers and A4 sheets

◆ Micro-Cut Security (2×15mm)

Shreds 40–60 sheets per pass

Meets **EU P-5 to P-6 security levels**

Suitable for financial, legal, and classified document disposal

◆ Powerful + Quiet

2.2KW motor supports continuous 3+ hours operation

Quiet at only 55dB – ideal for shared office environments

◆ 160L Extra-Large Bin

Easy-open front cabinet for fast emptying

◆ Optimized for Offices

Ideal for government departments, accounting teams, and secure workspaces

Preferred by Industry Leaders

The first choice for multinational corporations, industry leaders, and Fortune Global 500 enterprises.

Technical Specifications:

 Model	YD-448CC	YD-448CCM
 Feed Width (mm)	448mm	448mm
 Cut Size	3.9*45mm	1.9*15mm
 Max Sheets	50-70 (70g, A4)	40-60 (70g, A4)
 Weight (kg)	258kg	258kg
 Power	2.2KW	2.2KW
 L×W×H (mm)	1322*877*790mm	1322*877*790mm
 Bin(L)	160L	160L
 Price (USD)	\$9,715	\$11,828

YD-PSJ300ES 简款

产品概览 Product Overview



可以粉碎的物品 Shreddable Materials



主要参数 Technical Specifications

ID 型号	YD-PSJ300ES		
进纸宽度	500*380mm		
碎后尺寸(定制 ¹)	1*5cm		
碎纸能力	60-130		
重量	250kg		
额定功率	2.2KW / 380V		
连续工作	24 hours		
外形(mm)	850*700*1350mm		
废纸箱(升)	160L		
价格(¥)	19970 元		

Fig. 4: L×W×H (mm)

可通过办公室门和电梯门

¹ 可定制，常见尺寸：5.8×50mm, 4×40mm, 2×15mm, 1×10mm。
Documents · Metals · Plastics · Composites · Shredding Systems

YD-PSJ300ES

Product Overview




Shreddable Materials



Technical Specifications

Model	YD-PSJ300ES
Feed Width (mm)	500*380mm
Cut Size ²	1*5cm
Max Sheets	60-130
Weight (kg)	250kg
Power	2.2KW / 380V
Continuous	24 hours
L×W×H (mm)	850*700*1350mm
Bin(L)	160L
Price (RMB)	19970
Price (USD)	2853

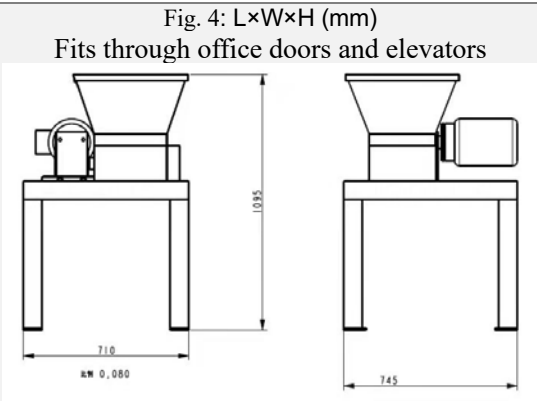

² Customizable sizes. Common options: 5.8×50mm, 4×40mm, 2×15mm, 1×10mm.
Documents · Metals · Plastics · Composites · Shredding Systems 第 23

YD-PSJ300 系列

产品概览 Product Overview

图 1：整机侧面图



图 2 整机正面图



图 3：入料效果图
(漏斗带自锁)



核心优势 Key Features

同时粉碎硬盘、线路板、书本


可以粉碎的物品 Shreddable Materials



主要参数 Technical Specifications

ID 型号	YD-PSJ300 2P1.5KW	YD-PSJ300 3P2.2KW
进纸宽度	500*380mm	500*380mm
碎后尺寸 ³	1*5cm	1*5cm
碎纸能力	40-70	60-130
重量	250kg	250kg
额定功率	1.5KW / 220V	2.2KW / 380V 三相
连续工作	24 hours	24 hours
外形(mm)	850*700*1350mm	850*700*1350mm
废纸箱(升)	废料仓 400L 纸篓 160L	废料仓 400L 纸篓 160L
价格(¥)	39997 元	58638 元

Fig. 4: L×W×H (mm)
可通过办公室门和电梯门

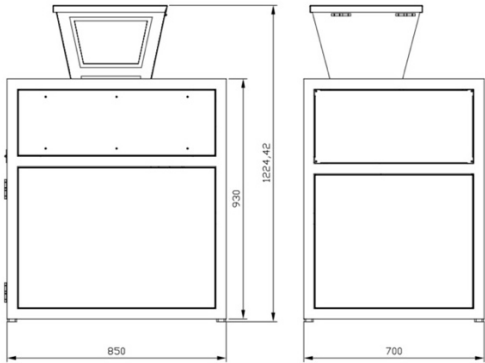

³ 可定制，常见尺寸：5.8×50mm, 4×40mm, 2×15mm, 1×10mm。

YD-PSJ300 Series

Product Overview

Fig. 1: Full View



Fig. 2: Front View



Fig. 3: Feeding View
(Hopper with Auto-Lock)



Key Features

shredding of diverse materials such as hard drives, PCBs, and paper-bound files.


Shreddable Materials



Technical Specifications

Model	YD-PSJ300 2P1.5KW	YD-PSJ300 3P2.2KW
Feed Width	500*380mm	500*380mm
Cut Size ⁴	1*5cm	1*5cm
Max Sheets	40-70	60-130
Weight (kg)	250kg	250kg
Power	1.5KW / 220V	2.2KW / 3 phase 380V
Continuous	24 hours	24 hours
L×W×H (mm)	850*700*1350mm	850*700*1350mm
Bin(L)	Waste Chamber 400L Waste Bin 160L	Waste Chamber 400L Waste Bin 160L
Price (USD)	5715	8378

Fig. 4: L×W×H (mm)
Fits through office doors and elevators

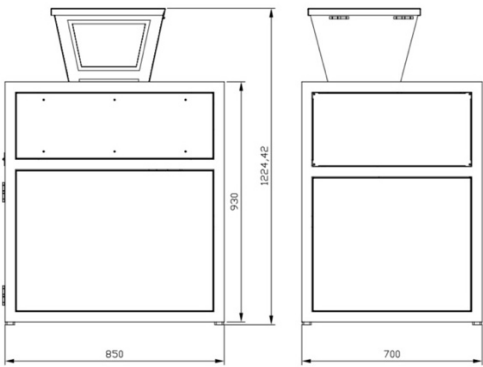

⁴ Customizable sizes. Common options: 5.8×50mm, 4×40mm, 2×15mm, 1×10mm.
Documents · Metals · Plastics · Composites · Shredding Systems 第 25

+ Custom Cases 更多定制案例

Front View	Feeding Inlet	Model	Price (USD)
		YD-400CC-HD	4115
		YD-458CC-HD	5545
		YD-PSJ250ES2	4490
		YD-PSJ250ES3	5688

YD-PSJ250ES2 设备详情图

产品概览 Product Overview



核心优势 Key Features

同时粉碎硬盘、线路板、书本 多用途切刀

可以粉碎的物品 Shreddable Materials



主要参数 Technical Specifications

ID型号	YD-PSJ250ES2
进纸宽度	漏斗式入料口 和 专用安全入口，漏斗入口大小 470*470mm
碎后尺寸	9.8*48mm 段状🍓
碎纸能力	40-60 张
重量	215kg
额定功率	220V 2KW
连续工作	24 hours 连续工作
外形(mm)	800*940*1380mm
废纸箱(升)	废纸篓容积 160L
价格(¥)	31430.2 元 、 4490USD



YD-PSJ250ES3 碎纸机



✔ 核心优势 Key Features

同时粉碎硬盘、线路板、书本 多用途切刀

✂ 可以粉碎的物品 Shreddable Materials



🔧 主要参数 Technical Specifications

ID 型号	
进纸宽度	500*380mm
碎后尺寸	1.5*5cm 粉末状
碎纸能力	50-130 张
重量	350kg
额定功率	2.2KW / 380V
外形(mm)	1240*850*1380mm
废纸箱(升)	废纸篓容积 160L
价格(¥)	39815.6 元

YD-400CC-HD 和 YD-458CC-HD

产品概览 Product Overview



可以粉碎的物品 Shreddable Materials

 Books  Cards  CDs/DVDs  Saddle Staples

 Cardboard  Paper Clips  Carton Staples (Heavy-Duty)

主要参数 Technical Specifications

 型号	YD-458CC-HD 双入纸口	YD-400CC-HD 双入纸口
 进纸宽度	460mm	400 mm
 碎纸效果	段状 3.8*40mm	段状 3.8*40mm
 碎纸能力	40-60 张/70g/m²	25-35 张/70g/m²
 连续工作	是	是
 机器重量	280kg	220kg
 额定功率	2KW, 220V/50Hz	1.7kw, 220V/50Hz
 外形尺寸	宽 530×长 480×高 1120mm	宽 610×长 560×高 1310mm
 废纸箱容量	168L	150 升

越都专用光盘粉碎机 YD-9221 系列

Product Overview

Fig. 1: Full View



Fig. 2: Feeding View



Fig. 3: Internal View



Key Features 专业光盘粉碎机

- Continuous operation over 3 hours
- 150L BIN

可以粉碎的物品 Shreddable Materials

粉碎菲林片



CDs/DVDs



Cards



主要参数 Technical Specifications:

ID 型号	YD-9221GPD	YD-9221CPD
入口宽度	310mm	310mm
粉碎效果	3.8*39mm	1.9*15mm
机器净重	98kg	100kg
额定功率	1.2KW	1.2KW
连续工作	3 小时以上	3 小时以上
外形尺寸	650*500*1234mm(漏斗 413*271*124mm)	650*500*1234mm (漏斗 413*271*124mm)
纸箱容量	150L	150L
价格	49800 元	59800

越都 YD-310CC26 机型

Product Overview

图 1: 整机正面图



图 2: 智能控制面板



图 3: 双入口进料



图 5: 刀具自润滑（一体钢刀 保用 10 年）



型号 YD-310CC26
每天碎纸量 500 - 800KG

- 粉尘和污染少:
- 带油泵, 方便给刀具上油润滑;
- 低噪音, 适合办公环境;

可以粉碎的物品 Shreddable Materials

A4 Paper Magazines Cards CDs/DVDs Receipts

主要参数 Technical Specifications:

ID 型号	YD-310CC26	YD-330CC
入口宽度	310mm	330mm
粉碎效果	3.9*35mm 粒状	3.9*40mm 粒状
粉碎能力	25-35 张	42-52 张
连续工作	12 小时	12 小时
机器净重	81kg	90kg
额定功率	1.5KW	1.8KW
外形尺寸	570*492*1010mm	570*492*1010mm
纸箱容量	130L	130L
价格	28800 元	

High-Security Certified Shredders

Overview

Compliant with EU Level 7 and China Level 1 security standards, suitable for confidential document destruction.

Featured Models

YD-M2405, YD-BM3115, YD-2405M

高保密等级碎纸机 High-Security Certified Shredders

【概览】符合欧盟 7 级和中国 1 级等高级别保密标准，适用于政府机关、金融机构及对信息安全有极高要求的单位。

【代表型号】：YD-M2405、YD-BM3115、YD-2405M



高保密粉碎机 2405M 型

粉碎 U 盘 光盘 卡片

功能：自动启动与停止功能，反转功能，过热保护，堵纸保护，纸满保护，密码锁开门，门开停机保护，独立电源开关；LCD 显示屏显示工作状态，自动待机。

产品规格表：

产品图片



- 开门密码锁
- 独立的光盘和卡入口



型号	YD-2405M	YD-U2405M
产品名称	高保密碎纸机	三合一粉碎机
是否有单独 CD 和 U 盘口	无	有
额定切纸量	5 张，70g A4	5 张，70g A4
粉碎光盘 CD，卡片，U 盘	不能粉碎	1-2 张每次
碎后规格	1*2 mm)	纸张：1*2 mm 光盘 CD 和 U 盘：2*5
入口宽度	240mm	入口 240mm (光盘和卡片入口 120MM)
碎纸桶容量	50L	50L
速度	3.5m/min	3.5 m/min
功率	550W	550W
使用电压频率	220V/50HZ	220V/50HZ
机身尺寸(LxWxH)	430 x 330 x 710 mm	430 x 330 x 710 mm
净重 (Kg)	约 32 Kg	约 35 Kg
毛重 (Kg)	约 37 Kg	约 37 Kg
销售报价 (RMB)	¥9450	¥11300

YD-2315

Product Overview

Fig. 1: Full View



Fig. 2: Feeding View



Fig. 3: Internal View



Key Features

- Continuous operation for 60 minutes
- Up to 15 Max Sheets

Application Scenarios

Offices Banks Finance Archives Executives

Shreddable Materials

A4 Paper Magazines Cards CDs/DVDs Receipts

Technical Specifications:

Model	YD-BM2315 粉末状
Feed Width (mm)	230mm
Cut Size	1*2mm 粒状
Max Sheets	12-15 张
Continuous	60 分钟
Weight (kg)	195kg
Power	1800W
L×W×H (mm)	700*550*955mm
Bin(L)	75L
Price (USD)	

图4：机器入口面板图
(智能操作面板，动态显示负载)



Product Overview

图 1：整机外观图



图 2：纸张进料图



图 3：机器内部 开门状态



产品价格： 25 万元 该机常用场景用途： 保密室

Key Features

- Feed Width 310 mm
- Up to 15 Max Sheets

Application Scenarios

Secure / Confidential Room

Shreddable Materials

A4 Paper Magazines Receipts

Technical Specifications:

ID型号	YD-BM3115 粉末
进纸宽度	310mm
碎纸效果	1 * 1~2mm 粒状
碎纸能力	13 - 15 张
连续工作	60 分钟
机器重量	150kg
额定功率	1500W
外形尺寸	660*560*1120mm
废纸箱容量	120L

图 4：机器入口面板图
(智能操作面板，动态显示负载)



2. 工业碎纸系列（Industrial Shredder Series）

三相电重载设备，适用于文档、标书、凭证等大批量销毁场景

特点：高负载、连续工作、可接入输送带或自动分选系统

Heavy-duty equipment powered by three-phase electricity, designed for high-volume destruction of documents, tenders, and vouchers.

Features: High load capacity, continuous operation, and compatibility with conveyor belts or automated sorting systems.

畅销产品型号： **YD-PSJ300**

YD-PSJ350

YD-PSJ500

YD-468CC-HD

YD-428CC-HD

YD-428ACC-HD

YD-428130

YD-500CC

Quick Selection 快速选型

 Front View

 Feeding Inlet

 Model

 YouTube

 Price(USD)

 Funnel-Type Dual Inlet Designs 漏斗入口（双入口）



YD-PSJ350

14102



YD-PSJ500

2 7 3 9 6



YD-468CC-HD

18,160

 Conveyor Belt Inlet (Belt Feeding System) 输送带入口（皮带进料）



YD-428ACC-HD

12,219



YD-428130

\$ 2 2,5 1 1



YD-500CC2024

\$ 4 0,8 3 5



YD-5002

漏斗入口（双入口） Funnel-Type Dual Inlet Designs

重型碎纸机 YD-PSJ350 机型（350M2 机型）

产品概览 Product Overview

图 1：整机正面图



图 2：整机侧面图



图 3：大容量漏斗入料口



图四：平面入口和漏斗入口安全盖



核心优势 Key Features

大入口 593*506mm 每次 200-300 张 可通过办公室门和电梯门

可以粉碎的物品 Shreddable Materials



主要参数 Technical Specifications

ID 型号	YD-PSJ350	YD-PSJ350M2	YD-PSJ350M1
进料口尺寸	大容量漏斗入口尺寸：593*506mm； 漏斗入口可以倒入需要粉碎的物料，漏斗入口盖自带安全锁。		
碎后尺寸 ⁵	1*5cm	2*15cm	1*10mm
碎纸能力	90-180	50-60	10
重量	370kg	370kg	370kg
额定功率	3.7kw, 3 phase, 380V (可定制单相电，适合办公室 220V 电压)		
连续工作	24 hours		
外形(mm)	1350 * 720 * 1398 mm 整机尺寸，不含包装；活动脚轮，轻易通过 80CM 宽的门 和 进入常用写字楼电梯		
废纸箱(升)	废料仓 525L; 废纸篓 160L		
价格(¥)	99750		

⁵ 可定制，常见尺寸：5.8×50mm, 4×40mm, 2×15mm, 1×10mm。

YD-PSJ3500 / 350M2 / 350M1

Product Overview

Fig. 1: Front view of complete machine



Fig. 2: Side view of complete machine



Fig. 3: Feeding port of large capacity hopper



Figure 4: Safety cover for plane entrance and funnel entrance



Key Features

Engineered for powerful shredding of diverse materials: hard drives, PCBs, elt.

Shreddable Materials



Technical Specifications

ID Model	YD-PSJ350	YD-PSJ350M2	YD-PSJ350M1
Feed Width	Hopper inlet and flat inlet. Inlet size of large capacity funnel: 593 * 506 mm; Materials to be crushed can be poured into the hopper inlet, and the hopper inlet cover is provided with a safety lock.		
Cut Size ⁶	1*5cm	2*15cm	1*10mm
Max Sheets	90-180	50-60	10
Weight (kg)	370kg	370kg	370kg
Power	3.7kw,3 phase,380V (can be customized for single phase, 220V office use)		
Continuous	24 hours		
L×W×H (mm)	1350 * 720 * 1398 mm machine size, excluding packaging; movable casters, easy to pass through 80 CM wide door and enter common office building elevator		
Bin(L)	Waste Chamber 525L; Waste Bin 160L		
Price (USD)	14102		

⁶ Customizable sizes. Common options: 5.8×50mm, 4×40mm, 2×15mm, 1×10mm.

 越都 YD-PSJ500 (3P7.5KW) 机型

 产品概览 Product Overview



 核心优势 Key Features

大入口 680*530mm 每次 200-300 张

 可以粉碎的物品 Shreddable Materials



 主要参数 Technical Specifications

YD-PSJ500 型	碎纸量（每次）	100-300 张（*粉碎硬盘：可选配置，每次粉碎 3-5 块）	市场价格： 18.87 万元
	粉碎尺寸	碎后尺寸 20*120mm 块状	
	粉碎产量（纸张）	500-1000KG/小时	
	入料口尺寸	680*530mm（  漏斗带自锁）	
	废料容积	160L	
	电机功率	7.5KW，380V	
	设备重量	850KG	
	整机尺寸：深度 84.2CM * 宽度 167CM * 高度 141CM		

越都 YD-468CC-HD 机型 产品参数

产品概览 Product Overview



可以粉碎的物品 Shreddable Materials

Books Cards CDs/DVDs Saddle Staples

Cardboard Paper Clips Carton Staples (Heavy-Duty)

主要参数 Technical Specifications:

ID型号	YD-468CC-HD
进纸宽度	460mm
碎后尺寸 ⁷	5.8*50mm
碎纸能力	100-130
重量	450kg
额定功率	3.7kw, 3 phase, 380V (可定制单相电, 适合办公室 220V 电压)
连续工作	24 hours
外形(mm)	1290mm*1300mm*1680mm
废纸箱(升)	300L
价格(¥)	18,160 USD



⁷ 可定制粉碎尺寸粉碎尺寸 4*40mm 或 2*15mm

输送带入口（皮带进料） Conveyor Belt Inlet (Belt Feeding System)

YD-428ACC-HD 机型

产品概览 Product Overview



可以粉碎的物品 Shreddable Materials

 Books  Cards  CDs/DVDs  Saddle Staples

 Cardboard  Paper Clips  Carton Staples (Heavy-Duty)

主要参数 Technical Specifications:

 型号	YD-468CC-HD
 进纸宽度	400mm
 碎后尺寸 ⁸	5.8*50mm
 碎纸能力	70-100
 重量	450kg
 额定功率	3.7kw, 3 phase, 380V (可定制单相电, 适合办公室 220V 电压)
 连续工作	24 hours
 外形(mm)	1238mm*1680mm*1600mm
 废纸箱(升)	300L
 价格(¥)	12,219 USD

✚ 典型定制需求如:

1. 适用于 220V 办公用电使用;
2. 粉碎尺寸 4*40mm 或 2*15mm;
3. 配置进料输送带 或 出料输送装置;
4. 配置出料自动打包机;

⁸ 可定制粉碎尺寸粉碎尺寸 4*40mm 或 2*15mm

YD-428130

产品概览 Product Overview

图 1：整机图侧面

图 2：整机正面，平铺入口及可视窗

图 3：整机图后面

图 5：出料输送装置拉出来效果



主要参数 Technical Specifications:


ID型号	YD-428130	YD-428130M2
进纸宽度	460mm	
碎后尺寸 ⁹	5.8mm*50mm	2*15mm
碎纸能力	130 张	60 张
重量	500kg	
额定功率	3.7KW 三相电 380V	
连续工作	24 hours	
外形(mm)	1290 mm *1450 mm *1660 mm (如果选配附带出料传送带，则深度为 2450)	
废纸箱(升)	300L	
价格(¥)	\$22,511 USD	



+可选配置：打包机部分

打包部分参数
每小时出包量：5-8 包 包块重量：50-70kg
压缩能力：80kN 打包尺寸：565x480x(200~700)mm
电机功率：三相 380V , 3.7KW, 10A
整机尺寸(mm): 2390x685x970mm
净重: 600kg

含打包机尺寸图

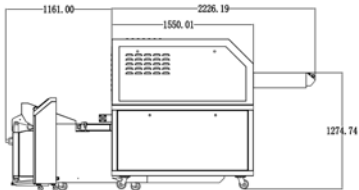

⁹ 可定制粉碎尺寸粉碎尺寸 4*40mm 或 2*15mm

YD-500CC2024 碎纸机 (500 张)

产品概览 Product Overview



主要参数 Technical Specifications:

保密等级 DIN 66399 P-2/O-2/T-2/E-2 P-3/O-2/T-3/E-2 P-4/O-3/T4/E-3 P-5/O-4/T5/E-4/F-2

 进纸口宽度(mm)	500			
 粉碎规格(mm)	10. 5x40-75	6x50	3. 8x40	1. 9x15
 单次碎纸能力/70g	500-550	340-380	180-200	90-100
 木箱打包重量 KG	1200			
 电压/功率	7. 5kw, 3 phase 400 V			9. 5kw, 3 phase 400V
 整机尺寸(mm)	1318×1843×1638			
 木箱打包尺寸(mm)	1450×2000×1800			
 垃圾桶容量	550L			
 Price (USD)				

+ 可选扩展配置 Optional Add-ons

前端可配落地式输送带，辅助高效进料；后端搭配废料出口打包系统，实现高效一体化处理。



Technical Specifications:

Security Level (DIN 66399)	P-2/O-2/T-2/E-2	P-3/O-2/T-3/E-2	P-4/O-3/T4/E-3	P-5/O-4/T5/E-4/F-2
Feed Width (mm)	500	500	500	500
Cut Size(mm)	10.5x40-75	6x50	3.8x40	1.9x15
Max Sheets	500-550	340-380	180-200	90-100
Weight (kg)	1200	1200	1200	1200
Power	7.5KW 3 x 400 V/50 Hz	7.5KW 3 x 400 V/50 Hz	7.5KW 3 x 400 V/50 Hz	9.5KW 3 x 400 V/50 Hz
L×W×H (mm)	1318×1843×1638	1318×1843×1638	1318×1843×1638	1318×1843×1638
Bin(L)	550L	550L	550L	550L
Price (USD)				

Optional Add-ons:

Floor-mounted conveyor and rear baling system for efficient shredding and compact waste handling.

越都 YD-5002 碎纸打包一体机 (500 张)

产品概览 Product Overview



将大容量文件粉碎机 500CC 与 10T 打包机相结合，特别适用于档案馆或销毁中心、保密室

文件最大销毁量 500kg/h，然后，视情况可压成重达 50-75 公斤的废纸包块。

主要参数 Technical Specifications:

 产量/h: 500-600kg




 每个包块重量: 50-75 kg

 打包压力: 85 kN

 电源: 11.5 kW, 3 相 400 V / 50 HZ

 L×W×H (mm): 3257*2588*2284

整体方案三视图:

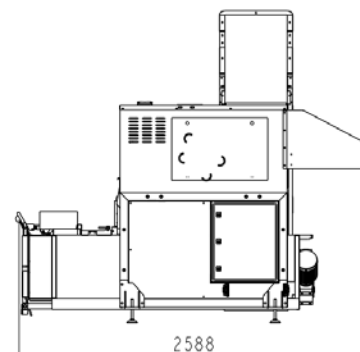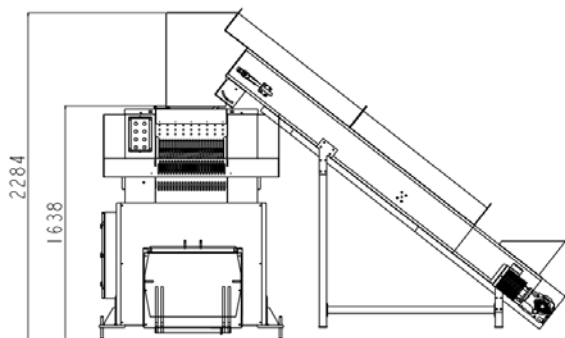

YD-5002 Book Shredding & Baling Systems

Product Overview






500CC shredder + 10T baler combo, ideal for secure rooms and archives.

Shreds up to 500 kg/h, compresses into 50–75 kg paper bales.

Technical Specifications:

-  Output/h: 500–600 kg
-  Bale Weight: 50–75 kg
-  Baling Pressure: 85 kN
-  Power: 11.5 kW, 3 phase 400 V / 50 HZ
-  L×W×H (mm): 3257*2588*2284

System Overview: Three-View Diagram

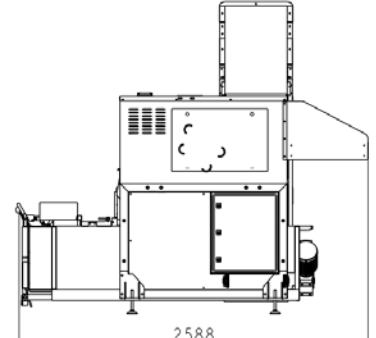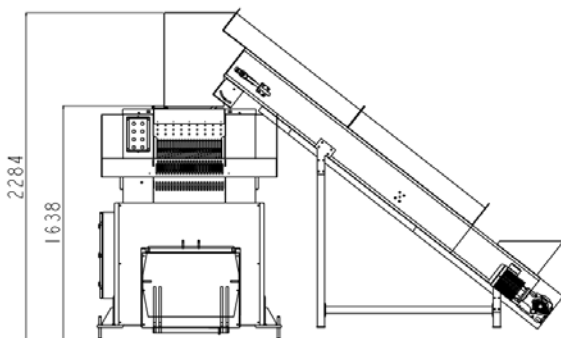

YD-500 机型 | 270~600 系列参数对比表

产品概览 Product Overview

图 1：整机侧面图




图 2：入纸口面板



图 3：整机大图（全钢机身）



各类材料效果（条状 和 块状）

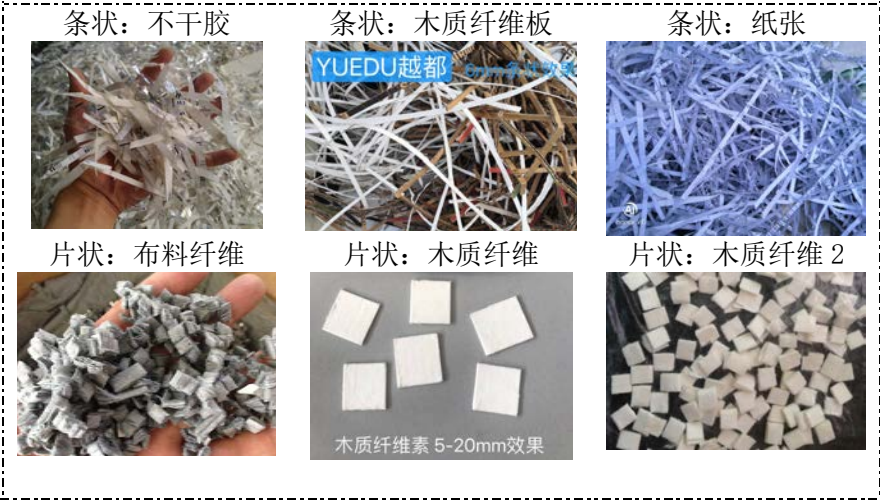

刀具耐磨、使用寿命长，适合多种涉密介质的粉碎；该碎纸机主机体采用 Q345B 材料焊接、消除应力处理，具有良好的稳定性、抗冲击性、振动性，确保设备在长时间重负荷中安全运行。**粉碎效果：**根据客户要求，定制出料条状或者出料片状（如上图）。**出料方式：**可外接出料输送线或中央吸风管道。**可碎：**木质纤维素，纸张，菲林，纸箱，等。

主要参数 Technical Specifications:

型号	YD-500
输送带长度	1.6 米
输送带宽度	500mm
进纸宽度	500mm
入料口高度	2.5CM
定制条效果	6 - 100mm 直条
进料厚度	6mm(20-50 张 A4)
碎纸速度	6 米/分钟
噪音等级	60dB
机器净重	500KG
额定功率	5.5-13KW, 380V
外形尺寸	2.1*1.1*1.32mm
出料方式	落料到地上 或 出料输送带 或 外接输送带/风管
产品价格	75790 元

32820 样机系列(展厅现货)

产品概览 Product Overview

图 1：整机图侧面



图 2：特制防滑输送带入纸口



32820 系列样机特价：

YD-32820 价格：15700 万元（上海现货）

YD-328CC20 价格：27790 元

商品描述：

主要参数 Technical Specifications

工作方式	YD-32820 传送带式	YD-328CC20 传送带式
碎纸形状	条状 宽 5mm	段装 5mm×40mm
碎纸厚度	20 - 25 张/70g/m²	18 - 23 张/70g/m²
碎纸速度	373mm/min	373m/min
进纸台宽度	600mm	600mm
废物箱容积	120L（宽 510mm×长 440mm×高 500mm）	120L（宽 510mm×长 440mm×高 500mm）
外型尺寸	宽 605mm×长 1050mm×高 1050mm（含脚轮）	宽 605mm×长 1050mm×高 1050mm（含脚轮）
传送带宽度	325mm	325mm
机器净重	320kg	320kg
最大功率	1.5KW	1.5KW
电 源	220V/50Hz	220V/50Hz

428 系列 输送带式大型碎纸机

产品概览 Product Overview

图 1：整机图侧面




图 2：入纸口：大量连续的保密票据进入



图 3：入纸口皮带



图 4：整机打包装箱过程

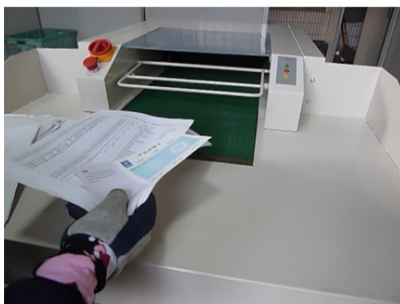

碎纸机功能：

进纸口安全防护装置/超量、过载自动反转停机/满纸断电装置/下箱开门断电装置/上观察口开启断电装置/正转碎纸/停机/反转/待机 LED 灯操作指示系统/主电源开关/紧急停止开关/刀具润滑装置/带锁移动脚轮装置

主要参数 Technical Specifications

ID 型号	YD-428-HD 传送带式	YD-428CC-HD 传送带式
进纸宽度	428mm	428mm
碎后尺寸	条状 宽 5.8mm	5.8mm×50mm
碎纸能力	70-100 张/70g/m ²	60-90 张/70g/m ²
重量	380kg	380kg
额定功率	4KW, 380V/50Hz	4KW, 380V/50Hz
外形(mm)	宽 1006mm×长 1603mm×高 1220mm 其中脚轮 120mm	宽 1006mm×长 1603mm×高 1220mm 其中脚轮高 120mm
废纸箱(升)	450L	450L
价格(¥)		

3. FSJ 高速刀系列（FSJ High-Speed Cutter Series）

适用于带塑料材质、复合板材、5-8CM书本、印刷品、包装厂废料等较厚实的物料粉碎，可以根据用户具体使用需求设计成生产线，以及与用户生产线前端和后端处理设备连接。

Suitable for shredding thicker materials such as plastic composites, laminated boards, 5–8 cm thick books, printed materials, and packaging waste.

The system can be customized into a production line according to specific user requirements, and can be integrated with upstream and downstream processing equipment.

子系列：

PC 片刀系列（PC Series）

适用于塑料膜、广告PVC边角料、卡片 产品选型表： 畅销产品型号： YD-FSJPC300

Quick Selection 快速选型

Front View

OVERALL

Model

YouTube

Price

PC Series (PC 片刀系列)



PC300
PC400
PC500
PC600

QL Series (QL 强力系列)



QL300
QL400
QL500
QL600
QL800

GD Series (Belt Feeding System) (GD 滚刀系列)



GD370




GD800
GD1200

SL Silent Series



SL600
SL700

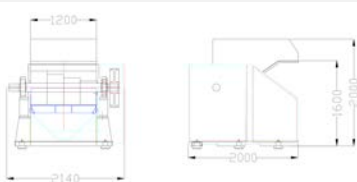

SL60120

Custom Cutter Series



SL6090

PC-B 系列 塑料粉碎机 Plastic crusher

产品概览 Product Overview



粉碎各种软硬塑胶，将块状、条状及水口塑胶粉碎成颗粒，对塑胶次品、废品、水口料的迅速回收起到重要作用，可做在线机边粉碎机，置于主机边；也可做某生产区域线下集中处理粉碎机。

特点:

- 高铬工具钢,间隙可调,经久耐用
- 超大惯性轮,扭矩大,产能高.
- 重荷型轴承及防尘装置,并有防音隔板，能有效防止震动和噪音
- 交替式切削有效减少粉尘及节能
- 移动脚轮,方便摆放.

主要参数 Technical Specifications

Model	PC-250B	PC-300B	PC-400B	PC-500B
电机功率 Power (kw)	4	4	7.5	11
主轴转速 Rotating Speed (r/min)	570	570	570	550
旋转直径 Rotating Φ Dia (mm)	200	200	300	300
动刀数 Moving blades (pcs)	3	3	3	6
定刀数 Fixed blades (pcs)	2	2	2	2
进料口尺寸 Feeding inlet (mm)	310x170	360x170	460x230	560x230
粉碎能力 Crushing ability (kg/h)	150	200	300	400
筛网直径 Screen mesh Φ (mm)	Φ 8	Φ 8	Φ 10	Φ 10
重量 Net Weight (kg)	130	150	370	450
外形尺寸 Dimensions (L*W*H) (mm)	920*620*1100	920*670*1100	1160*800*1360	1180*960*1380

越都 YD-FSJPC300 机型 产品性能介绍 和 主要参数

产品概览 Product Overview

图 1：整机图




图 2：纸团粉碎



图 3：财务凭证粉碎



粉碎效果:

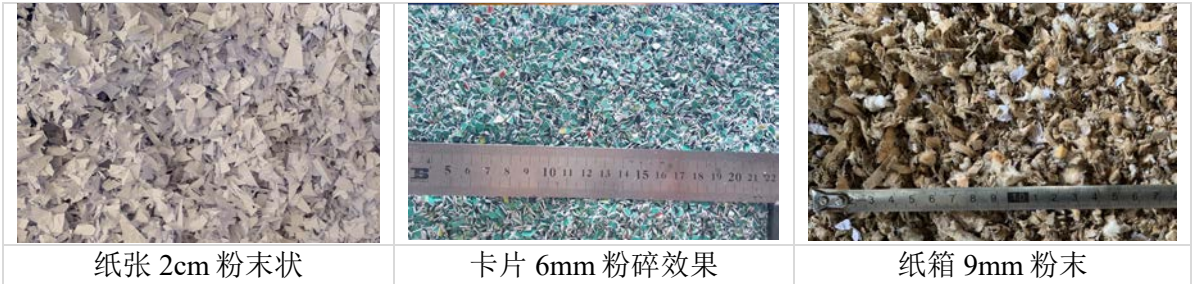

主要参数 Technical Specifications

型号	YD-FSJPC300
入料口离地高	102cm
入料口尺寸	35*20cm
粉碎尺寸	8mm 内粉末状 (可选配 3CM, 2CM 或 3mm, 5mm 粉末)
电压功率	380v 4kw 50Hz 工业用电 或 220V 4KW 办公用电（可选） （出厂标配 380V 电机。如需配置 220V 市电机型，请下单前联系客服。）
刀具转速	550r/min
外形尺寸	93*67*117cm 长*宽*高
机重	180KG
工作视频	哔哩哔哩视频 1——粉碎 100 张纸： https://b23.tv/NEEZpDp 哔哩哔哩视频 2——粉碎广告 PVC 物料： https://b23.tv/Tbdi7p4
产品价格	6931 元

QL 强力系列 (QL Series)

适用于财务会计凭证、书本等较厚的材料 产品选型表： 畅销产品型号： YD-FSJQL300 YD-FSJQL400 YD-FSJQL500 YD-FSJQL600 YD-FSJQL800

YD-FSJQL 系列 300-800 型漏斗大功率机型

产品概览 Product Overview



核心优势 Key Features

- 大马力
- 合金刀具
- 符合 EHS 标准：符合环境、健康与安全标准。
- 大块机头料粉碎

主要参数 Technical Specifications

产品型号	YD-FSJQL300	YD-FSJQL400	YD-FSJQL500	YD-FSJQL600	YD-FSJQL800
入口尺寸(mm)	310*260	410*260	510*260	610*310	810*410
碎纸张数 ¹⁰	30-50 张	70-80 张	100-150 张	200-300 张	400-800 张
粉碎能力 ¹¹ (kg/h)	100-200	150-250	200-350	300-600	500-800
电机功率	5.5KW, 380V	7.5KW, 380V	11KW, 380V	15KW, 380V	30KW, 380V
出料 (可定制 ¹²)	8mm	8mm	8mm	8mm	8mm
产品尺寸 (m)	1.22x0.72x1.16	1.32x0.86x1.46	1.45x1.00x1.54	1.70x1.15x1.88	2.22x1.38x2.38
重量 (kg)	450	550	750	850	2000
产品售价 (含税)	15847	19781	23929	38423	79618

¹⁰ 表格中粉碎张数为首次投料的张数，机器长期工作时，每次应均匀投料，待粉碎腔体中物料粉碎完毕后，再进行投料操作，如果连续投料，建议每次投料塑料为表格中数值的 1/3 以内。

¹¹ 该粉碎能力为最大值，比如粉碎硬质塑料类物料；如果粉碎纸张，粉碎能力会打折，粉碎产量与出料尺寸有关（粉碎尺寸越大，出料越快），如果粉碎纸张，建议粉碎为 3cm 尺寸速度较快，粉碎能力约为表格中最大粉碎数值的 1/3。

¹² 可定制 3mm 5mm 8mm 15mm 18mm 25mm 28mm 等规格尺寸，出厂标配为 8mm 尺寸，更多信息详询公司客服。

Documents · Metals · Plastics · Composites · Shredding Systems 第 57 Empowering Global Industries with Shredding Solutions.

YD-FSJQL800



主要参数 Technical Specifications

产品型号	YD-FSJQL800
入口尺寸(mm)	810*410
碎纸张数 ¹³	400-800 张
粉碎能力 ¹⁴ (kg/h)	500-800
电机功率	30KW, 380V
出料 (可定制 ¹⁵)	8mm
产品尺寸 (m)	2.22x1.38x2.38
重量 (kg)	2000

¹³ 表格中粉碎张数为首次投料的张数，机器长期工作时，每次应均匀投料，待粉碎腔体中物料粉碎完毕后，再进行投料操作，如果连续投料，建议每次投料塑料为表格中数值的 1/3 以内。

¹⁴ 该粉碎能力为最大值，比如粉碎硬质塑料类物料；如果粉碎纸张，粉碎能力会打折，粉碎产量与出料尺寸有关（粉碎尺寸越大，出料越快），如果粉碎纸张，建议粉碎为 3cm 尺寸速度较快，粉碎能力约为表格中最大粉碎数值的 1/3。

¹⁵ 可定制 3mm 5mm 8mm 15mm 18mm 25mm 28mm 等规格尺寸，出厂标配为 8mm 尺寸，更多信息详询公司客服。

Documents · Metals · Plastics · Composites · Shredding Systems 第 58 Empowering Global Industries with Shredding Solutions.

YD-GD370 Series Parameter Comparison Table | Strip-Cut Shredding Performance

定制 YD-GD370 系列参数对比表 | 切条切断效果

Image 1: Side view of the whole machine
图 1: 整机侧面图

Image 2: Discharge outlet
图 2: 出料口

Image 3: Overall view of the machine with additional discharge conveyor belt
图 3: 整机大图 加配出料输送带



Effects of various materials (strip and block):
各类材料效果（条状和块状）

Strip: Adhesive
条状：不干胶



Strip: Wood fiber board
条状：木质纤维板



Strip: Paper
条状：纸张



Image 4: Overall view of the machine with additional discharge conveyor belt at the customer site
图 4: 整机 加配出料输送带 用户现场



The blades are wear-resistant and have a long service life, making them suitable for shredding various sensitive materials. The main body of the shredder is welded with Q345B material and undergoes stress relief treatment, ensuring good stability, impact resistance, and vibration resistance, thus ensuring safe operation under long-term heavy loads. Shredding Effect: Customized output in strip or chip form according to customer requirements (as shown in the figure above). Discharge Method: Can be connected to an external discharge conveyor or central suction duct. Can shred: Wood cellulose, paper, film, cardboard, etc. 刀具耐磨、使用寿命长，适合多种涉密介质的粉碎；该碎纸机主机体采用 Q345B 材料焊接、消除应力处理，具有良好的稳定性、抗冲击性、振动性，确保设备在长时间重负荷中安全运行。**粉碎效果：**根据客户要求，定制出料条状或者出料片状（如上图）。**出料方式：**可外接出料输送线或中央吸风管道。**可碎：**木质纤维素，纸张，菲林，纸箱，等。

主要参数 Technical Specifications

Product Model 产品型号	YD-GD370A 型	YD-GD370B 型 变频控制
Entry Width 入口宽度	370mm（可定制宽度，如 42cm,60cm,80cm）	
Shredded Size [1] 粉碎后尺寸 ¹⁶	Size A1: Options for strip sizes of 2.5cm, 5cm, and 8cm. 尺寸 A1: 2.5CM, 5CM, 8CM 条状可选 Size A2: Options for strip sizes of 1cm, 3cm, and	Size B1: 8mm strips (operators can adjust shredding size from 8 to 80mm strips). 尺寸 B1: 8mm 条（操作人员可自行调整粉碎尺寸 8 ~ 80mm 条） Size B2: 3mm strips (operators can adjust shredding size from

¹⁶ 可根据客户要求定制粉末状粉碎效果。
Documents · Metals · Plastics · Composites · Shredding Systems 第 59 Empowering Global Industries with Shredding Solutions.

	5cm. 尺寸 A2: 1CM, 3CM, 5CM 条状可选	3 to 30mm strips). 尺寸 B2: 3mm 条 (操作人员可自行调整粉碎尺寸 3 ~ 30mm 条)
Total Motor Power 电机总功率	7KW	7KW
Input Belt 输入带	1400*330mm; Standard factory configuration, extendable according to user requirements for convenient on-site feeding by specific users. 出厂标配, 可根据用户需求延长, 方便特定用户现场进料	
Output Belt 输出带	1400*330mm; Optional: Standard factory configuration does not include discharge conveyor belt. 选配, 出厂标准配置不含出料输送带	
Main Machine Dimensions 主机尺寸	2100*1000*1100mm	
Capacity 产量	300-500kg/h	
Product Price 产品价格	Size A1: RMB 34,100 尺寸 A1: 34100 元 Size A2: RMB 36,100 尺寸 A2: 36100 元	Size B1: RMB 36,786 尺寸 B1 : 36786 元 Size B2: RMB 38,786 尺寸 B2: 38786 元

Description: This model belongs to the belt-fed shredder series, commonly used in waste disposal stations and large-scale document destruction centers.

说明: 本机型为皮带进料碎纸系列, 常用于废品站和大型文件销毁中心。

YD-GD800 机型 条状效果

产品概览 Product Overview

Model: YD-GD800B | Produces strip-cut effect




主要参数 Technical Specifications

	English	简体中文
Equipment Parameters: 设备参数	- Blade Length: 800mm - Shredded Strip Width: 5 - 30mm (adjustable) - Effective Width of Feed Inlet: 720mm - Cutting Thickness: Within 5-8cm - Matching Power: 23KW - Input Conveyor: 3000*720mm - Output Conveyor: 3000*720mm - Control: Electric Control Box	刀具的长度 800mm 粉碎条状的宽度 5 - 30mm (可调) *可定做粉末状, 如 3mm 或者 5mm 方块 进料口有效宽度 720mm 剪切厚度 5-8cm 以内 配套动力 23KW 输入带 3000*720mm 输出带 3000*720mm
Pricing 价格	Pricing RMB: RMB 127500 Pricing USD: 18215	不含税含运价格 99780 元 含税含运价格 127500 元
User Site Case Study Video 1 用户现场 1	Secure Document Disposal: YUEDU GD Series Book Shredder Solution https://youtube.com/shorts/u4YYAzKWnjE	【烟包二维码粉碎方案 (第 2 集)】: https://b23.tv/D4hHk2w
User Site Case Study Video 2 用户现场 2	https://youtube.com/shorts/mdwfxZ2o6l0	【包装印刷厂卷烟厂产品包装二维码粉碎方案 (第三集)】: https://b23.tv/aQ4ADPm

Installation Dimension Diagram (Three Views)

安装尺寸图 (三视图)

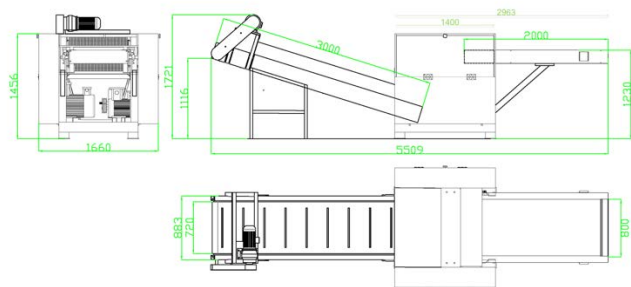

The dimensions confirmed by both parties shall prevail when placing the order.

以下单时，双方确认尺寸为准

SL 静音型强力系列 (SL Silent Power Series)

低噪音，适合3-5CM整本标书粉碎 产品选型表： 畅销产品型号： YD-SL400 YD-SL500 YD-SL600 YD-SL700 YD-SL800

YD-SL500 | 600 | 700 静音型大功率书本粉碎机



整机正面图



整机内部图



安全入料口



全封闭废料仓

二十年的设计卓越 | 创新的客户应用与全球尖端技术

我们自主研发的新产品融合了数十年的经验、实用的客户应用以及最先进的技术。其主要特点包括但不限于以下方面：

- **符合 EHS 标准：** 完全符合跨国企业的环境、健康与安全标准。
- **符合 EHS 标准：** 完全符合跨国企业的环境、健康与安全标准。
- **高效低耗：** 节省成本，同时提供卓越性能。
- **零泄漏：** 运行过程中无材料泄漏、无粉尘排放、无物料回流。
- **处理极限材料：** 超厚、超硬材料的加工。
- **适应低熔点塑料和橡胶：** 适合处理对热敏感的材料。
- **兼容玻纤和矿物材料：** 专为坚硬、磨蚀性物质设计。

行业领军者的首选

我们是跨国企业、行业领导者以及全球 500 强企业的首选合作伙伴。

技术参数：

产品型号	YD-SL500	YD-SL600	YD-SL700
入口尺寸(mm)	400*250	500*260	600*300
碎纸张数 ¹⁷	150-250 张	300-500 张	400-600 张
粉碎能力 ¹⁸	200-350 kg/h	300-600 kg/h	400-600kg/h
电机功率	7.5KW, 380V	11KW, 380V	15kw, 380V
出料（可定制 ¹⁹ ）	8mm	8mm	8mm
尺寸（mm）	1240*1000*1563	1395*1160*1689	1550*1230*2350
重量（kg）	450	700	900
产品价格	6.7669 万元	8.2715 万元	9.7761 万元

¹⁷ 长期运行：请均匀投料，并在粉碎室内材料完全处理后再加入新的材料。对于连续投料，每批次的投料量不得超过表格中规定值的三分之一。

¹⁸ 粉碎能力：所列的粉碎能力为最大值，适用于硬质塑料。对于纸类材料，粉碎能力会降低，并取决于输出尺寸（尺寸越大处理速度越快）。建议粉碎纸类材料时选择 3 厘米的输出尺寸以提高处理效率。

¹⁹ 可定制尺寸：提供 1 毫米、3 毫米和 5 毫米规格。若需其他选项，请联系客户服务。

YD-SL500 | 600 | 700 Silent High-Power Book Shredder



Front View



Internal View



Safe Feeding Inlet



Fully Enclosed Waste Bin

Twenty Years of Design Expertise, Proven Client Applications, and Innovative Global Technologies

As a pioneering new product, it integrates two decades of engineering excellence, extensive client application cases, and globally innovative technology. Features include but are not limited to:

- **EHS-Compliant:** Fully aligned with global Environmental, Health, and Safety standards, trusted by multinational corporations.
- **High Efficiency, Low Energy Consumption:** Saves costs while delivering exceptional performance.
- **Zero Leakage:** No material leakage, no dust emissions, and no material return during operation.
- **Handles Extreme Materials:** Suitable for ultra-thick and super-hard materials.
- **Adaptable to Low-Melting Plastics and Rubber:** Ideal for processing heat-sensitive materials.
- **Compatible with Glass Fiber and Mineral Materials:** Designed for tough, abrasive substances.

Preferred by Industry Leaders

The first choice for multinational corporations, industry leaders, and Fortune Global 500 enterprises.

Technical Specifications:

Product Model	YD-SL500	YD-SL600	YD-SL700
Inlet Dimensions (mm)	400*250	500*260	600*300
Number of Sheets Shredded ²⁰	150-250	300-500	400-600
Shredding Capacity ²¹	200-350 kg/h	300-600 kg/h	400-600kg/h
Motor Power	7.5KW, 380V	11KW, 380V	15kw, 380V
Shredded Size(Customizable) ²²	8mm	8mm	8mm
Dimensions (mm)	1240*1000*1563	1395*1160*1689	1550*1230*2350
Weight (kg)	450	700	900
Pricing RMB	67669	82715	97761
Min. RMB	25714	36429	55715

²⁰ For Long-Term Operation: Feed materials evenly and wait until the materials in the shredding chamber are fully processed before adding more. For continuous feeding, ensure each batch is no more than one-third of the value specified in the table.

²¹ Shredding Capacity: The listed capacity is the maximum, applicable to hard plastics. For materials like paper, the shredding capacity decreases and depends on the output size (larger sizes process faster). For shredding paper, a 3 cm output size is recommended for faster processing.

²² Customizable Sizes: Available in 1mm, 3mm, and 5mm specifications. For additional options, please contact customer service.

SL 静音型大入口系列 (Wide Feed Series)

大口入，适合较大物料。如：塑料桶、真空挤出物料、复合材料等 产品选型表： 畅销产品

型号： YD-SL3040 YD-SL4060 YD-SL6090 YD-SL60120

典型应用：

塑料真空挤出行业

木塑板

大口径塑料

Industry Solutions: Confidential Destruction + Packaging Printing

产品概览 Product Overview



🏆 Twenty Years of Design Expertise

- **EHS-Compliant:** Fully aligned with global Environmental, Health, and Safety standards, trusted by multinational corporations.
- **High Efficiency, Low Energy Consumption:** Saves costs while delivering exceptional performance.
- **Zero Leakage:** No material leakage, no dust emissions, and no material return during operation.
- **Handles Extreme Materials:** Suitable for ultra-thick and super-hard materials.
- **Adaptable to Low-Melting Plastics and Rubber:** Ideal for processing heat-sensitive materials.
- **Compatible with Glass Fiber and Mineral Materials:** Designed for tough, abrasive substances.

🌐 Preferred by Industry Leaders

The first choice for multinational corporations, industry leaders, and Fortune Global 500 enterprises.

🔧 Technical Specifications:

Product Model	YD-SL3040	YD-SL4050	YD-SL4060	YD-SL4090	YD-SL6080	YD-SL60120
Inlet Dimensions (mm)	320*420	400*520	400*600	400*900	620*800	620*1200
Feed Height	1350	1700	1700	1600	2300	1600
Crushing Capacity (kg/h)	100-200	500-600	600-800	1000-1200	1300-1500	2600-3000
Motor Power	5.5KW, 380V	22KW, 380V	37KW, 380V	37KW, 380V	37KW, 380V	55KW, 380V
Discharge (Customizable)	8mm	12mm	12mm	12mm	12mm	14mm
Product Dimensions (m)	950*1120*1750	1788*1200*2100	1788*1200*2100	1850*1500*1810	2100*1800*3000	2000*2140*2000
Weight (kg)	550KG	1400KG	1200KG	1800KG	2500KG	7500KG
Product Price (including tax)	9.7751 万元	15.8571 万元	18.9785 万元	25.9071 万元	34.8571 万元	49.9715 万元
Agent Price	6.825 万元	9.9735 万元	12.8839 万元	18.8304 万元	25.7679 万元	35.6785 万元

YD-SL60120 | 1.2 米入口展板粉碎机

越都 1.2 米入口展板粉碎机，专为校园内宣传材料处理而设计。它能轻松粉碎展示广告牌、会议广告板等各种展示板和说明材料，确保高效、安全、操作简便。



刀具有效切割宽度：12000mm

入口宽度：1.2 米

整机尺寸：长 1.6 米，宽 1.5 米，高 1.6 米

粉碎尺寸：12mm（可调整尺寸）

功率：15kw

产能：500-800kg/小时

价格：15 万元

定制系列 Custom Cutter Series

适用于特种物料，如 磁性塑料，如 复合材料

+ 更多定制案例 Custom Case

 Front View

 OVERALL


 On-Site

 YouTube

磁性塑料



Merck



4. Twin-Shaft Shredder Series

Featuring a dual-shaft open feed design, suitable for processing industrial waste, boxed documents, plastic barrels, circuit boards, and other rigid materials.

Convenient for integration with upstream and downstream equipment in user production lines.



4. 双轴撕碎机系列（Twin-Shaft Shredder Series）

采用双轴开放式大入口设计，适用于处理工业废料、整箱文件、塑料桶、线路板等各类硬质物料，便于与用户生产线前端和后端处理设备无缝对接。

+ Custom Cases 更多定制案例

 Front View

 Feeding Inlet

 Model

 YouTube

 Price (USD)

YD-SSJ Series Twin-Shaft Shredder

Small Twin Shaft Shredders Selection Table v3

ID Model	⚡ Motor	⚙ Gearbox	🔪 Blade Spec.	📏 Blades Num.	🗑 Hopper Size (mm)	📏 L×W×H (mm)	💰 Price (RMB)	💰 Price (USD)
ID 型号	⚡ 电机	⚙ 减速机	🔪 刀片规格	📏 刀片数量	🗑 料斗尺寸	📏 外形尺寸	💰 人民币价	💰 美元报价
 Single Motor Model 单电机机型								
YD-SSJ300SK	3KW-4, 1 unit	k77,1 unit	Φ180*10	29	500*500*300	1100*650*1350	30500	4358
YD-SSJ400SK	5.5KW-4,1 unit	K87,1 unit	φ180*15	27	500*600*300	1250*650*1450	41800	5972
YD-SSJ400SK	5.5KW-4,1 unit	K87,1 unit	φ180*10	40	500*600*300	1250*650*1450	43800	6258
YD-SSJ500SK	7.5KW-4,1 unit	K97,1 unit	Φ200*20	24	600*700*400	1400*750*1600	57300	8186
YD-SSJ600SK	7.5KW-4,1 unit	K107,1 unit	Φ220*25	24	700*800*500	1600*900*1750	72500	10358
 Dual Motor Model 双电机机型								
YD-SSJ400DK	5.5KW-4, 2 unit	K87,2 unit	Φ180*15	27	500*600*300	1600*650*1450	62000	8858
YD-SSJ400DK	5.5KW-4, 2 unit	K87,2 unit	Φ180*10	40	500*600*300	1600*650*1450	59900	8558
YD-SSJ500DK	7.5KW-4,2 unit	K97,2 unit	Φ200*20	24	600*700*400	1900*750*1600	75400	10772
YD-SSJ600DK	7.5KW-4, 2 unit	K107,2 unit	Φ220*25	24	700*800*500	2100*750*1800	98600	14086

Custom Cases & Our Advantages 我们的优势

We provide on-site customized solutions based on your specific needs. With extensive experience in dual-shaft shredding applications, YUEDU Shredders is committed to efficient and honest communication to deliver precisely matched products and services. 我们根据用户的实际需求提供现场定制解决方案。越都公司在双轴撕碎机的领域拥有丰富的应用经验。我们期待与您进行高效、坦诚的沟通，提供精准匹配的产品与服务。

5. 存储介质销毁（Data Storage Destruction）

用于销毁硬盘、U盘、SSD、磁带、硒鼓、光盘等介质

可结合消磁+粉碎系统，支持定制1mm粉末级别

Designed for the destruction of hard drives, USB drives, SSDs, magnetic tapes, toner cartridges, and optical discs. Can be integrated with degaussing and shredding systems, supporting customization to 1mm powder-grade destruction.

产品选型表： 畅销产品型号： YD-YP300ES YD-YP300 YD-YP350 YD-XG450

YD-XG300SE

硬盘粉碎机 | Hard Drive Shredders /products/data-destruction/hard-drive

存储芯片粉碎机 | Storage Chip Shredders /products/data-destruction/chip

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
	越都品牌 硬盘粉碎产品线（消磁粉碎机一体机+硬盘粉碎机）													
	硬盘消磁粉碎一体机							硬盘粉碎机						
型号	XG400SE	XG300SE	YP200JM	YP500	YP400	YP350	YP400ES2	YJD-YP5002E-PLUS	YP400ES1	YP300-3P5.5KW	YP300-3P2.2KW	YP300-2P1.5KW	YD-YP300ES	
图片														
电机功率	15KW	7.5KW	3.7KW	11KW	7.5KW	7.5KW	15KW	11KW	7.5KW	5.5KW	2.2KW	1.5KW	2.2KW	
产品特点1	防尘防爆 粉碎服务器硬盘 可加监控/计数器	防尘防爆 粉碎服务器硬盘 可加监控/计数器	可加监控/计数器	粉碎服务器硬盘 可加监控/计数器	可加监控/计数器	可加监控/计数器	双电机 扭矩大 粉碎力强	粉碎服务器硬盘 大扭矩 粉碎力强	单电机 台式机硬盘	台式机硬盘 固态硬盘	适合粉碎固态硬盘	适合粉碎固态硬盘	适合粉碎固态硬盘	
产品特点2	自带消磁功能	自带消磁功能	自带消磁功能	自带消磁功能	自带消磁功能	自带消磁功能	碎所有硬盘介质 碎所有存储介质	碎所有硬盘介质 碎所有存储介质	自带脚轮 便捷移动	整机轻巧 方便移动	整机轻巧 方便移动	220V电压 方便移动	220V电压 方便移动	
切刀尺寸mm	400	300	200	500	400	300	400	200	400	250	250	250	250	
粉碎产量 (个/小时)	300	250	180	280	250	250	300	300	250	150-250	360	300-400	250	
切割尺寸cm	2*10	3*10		2 2*10	3*10	3*10	2*10	3*10	3*10	3*10	1*5	1*5	1*5	
服务器硬盘	是			是			是	是						
案例	某部队	某部队	广东海军陆战队 嘉兴销毁中心 广州花都保密局	上海马小修智能 中烟工业 秦皇岛某部队 西部战区司令部	公安部第一研究所 工信部 海南省公安厅 安阳法院	北京市人民法院 战略支援部队数据 中心 北京防化学院 第二军医大学	太原纸先生回收 柳州市辉萍环保	北京华新绿云 上海英迈物流	西部数据 SanDisk 收纸散	三星 生态环境部核与辐 射安全中心 贵阳航空电机	唯品会 美光 深圳龙华法院 中超伟业 东部战区海军保 障部	华新绿云上海 富士康 得物 武警工兵防化支 队	LG海力士无锡 信义玻璃 成都市公安局特 勤 贵州晨越环境	
价格（万）		37	30	25	20	18	16	12	10	8	10	6	4	2

Quick Selection 快速选型

Front View	Feeding Inlet	IDModel	YouTube	Price(USD)
 		YD-YP300ES		2
		YP300-2P1.5KW		4
		YP400ES2		1 2
		YP500		2 0
				
		YP200JM		2 5
		XG300SE XG400SE		3 0
		YD-PZ3020		2 0

+ 更多定制案例 Custom Case

Front View	Feeding Inlet	Model	Price (USD)
		YP350	
		YD-PSJ250ES2	
		YD-PSJ250ES3	

大型硬盘粉碎销毁机 YD-YP200JM 连续销毁整个硬盘

产品介绍：硬盘载体介质物理销毁

产品名称：YD-YP200JM（带计数功能）



机器规格：1850*750*1380mm

产品备注：多媒体存储介质销毁机 产品类别：3.5 寸/2.5 寸硬盘销毁设备。

适用单位：涉密销毁设备适用于信息安全类公司等、保密局、设计院。

产品功能

过载自动反转功能/手动进料功能/手动退功能

可选配件 1：全程可视化 DVR 录像，大屏幕查看粉碎过程

可选配件 2：计数器，见右图

碎断效果：20mm * 120mm 段状

入口 1 个 入口宽度 240mm

碎硬盘张数 (2.5 寸/3.5 寸)：2 MAX/1 MAX

可选配件 2：统计数量



越都 品牌 多功能存储介质销毁机 XG450

越都 品牌 多功能存储介质销毁机

防尘防爆设计

全封闭 防尘降噪

安全保障 (EHS)

防爆线缆



全封闭机身



不锈钢入料口 防尘降噪

正面



侧面



全封闭废料收集仓

不锈钢 隔音降噪



硒鼓粉碎机 粉末状

多功能销毁机 SE 系列

存储介质粉碎效果 9mm

粉碎效果 2*5CM

硒鼓粉末



硬盘颗粒



电子存储介质



可定其它形状, 如 3*3mm, 5*5mm 粉末等, 如需升级粉碎尺寸详询客服

硒鼓粉末



硬盘颗粒



电子存储介质



SE 系列多功能存储介质粉碎机粉碎的形状以客户下单所需要尺寸为准

产品参数:


型号	YD-XG320	YD-XG450	YD-XG300SE	YD-XG400SE
粉碎介质	硒鼓、各类存储芯片; 线路板、光盘和 U 盘、各类卡; 硬盘盘面、手机、平板电脑和电子存储介质;	硒鼓、各类存储芯片; 线路板、光盘和 U 盘、各类卡; 硬盘盘面、手机、平板电脑和电子存储介质;	硬盘 各类电子存储介质, 如 硒鼓, 手机, 平板电脑; 线路板、光盘和磁卡磁带、硬盘介质;	服务器硬盘, 各类硬盘介质 各类电子存储介质, 如 硒鼓, 手机, 平板电脑; 线路板、光盘和磁卡磁带、硬盘介质;
进口尺寸	320*320mm	420*320mm	300*200mm	400*320mm
销毁效果	9*9mm 粉末状;	9*9mm 粉末状;	2*10cm 颗粒;	2*10cm 颗粒 (服务器硬盘粉碎 3*10CM 颗粒);
粉碎产量	150-300KG/hour	200-400KG/hour	200-400KG/hour	400-600KG/hour
噪音等级	60dB	60dB	60dB	60dB
机器净重	1450kg	1650kg	1050kg	1150kg
额定功率	9.5KW (5.5+4KW) / 380V	9.5KW (5.5+4KW) / 380V	7.5KW / 380V	15KW / 380V
连续工作	24 hours 连续工作	24 hours 连续工作	24 hours 连续工作	24 hours 连续工作
外形尺寸	930*1800*1800mm (整机尺寸, 不含包装);	930*1800*1800mm (整机尺寸, 不含包装);	930*1800*1800mm (整机尺寸, 不含包装);	930*1800*1800mm (整机尺寸, 不含包装);
料仓容量	废料仓容积 90L	废料仓容积 90L	废料仓容积 90L	废料仓容积 90L
产品价格	435700 元	535700 元	335700 元	405700 元

不分较厚、硬度高的物料, 可能需进行产品升级改进

可定其它形状, 如 3*3mm, 5*5mm 粉末状等, 升级机型详询客服

越都硬盘消磁机 YD-XCJ01 型磁性存储介质信息清除机消磁销毁设备 消磁速度快 适用保密局政府部队

越都YD-XCJ01 磁性存储介质消磁机是一款大腔口（Super）消磁机，能够快速彻底销毁大体积磁性存储介质上信息的设备, 销毁介质包括服务器硬盘（不用拆除支架）、大体积磁带和磁卡、软盘等，该设备通过国家保密局和军队信息安全产品的鉴定，通过USB 端口与计算机连接，实现对消磁过程的计算机管理，可以将本机手动的消磁日志导入计算机，也可将通过计算机管理系统的消磁记录导出备份，同时将消磁结果用不干胶打印贴在销毁的硬盘上便于管理。


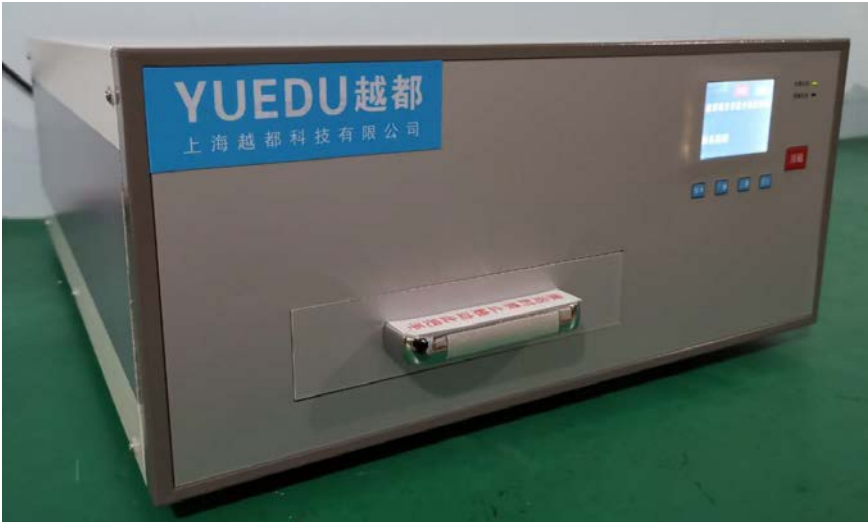


型号：YD-XCJ01

产品性能指标

性能子项	指标值
介质类型	台式机硬盘、带托架服务器硬盘、笔记硬盘、软盘、大型磁带、磁卡。
腔口尺寸	278x160.3x35.8mm
磁场强度	有效区域最低点场强高于 10000(GS)
消磁时间	25 秒
消磁日志管理	消磁过程有详细消磁日志记录，并可查询消磁记录，通过管理软件将本机消磁日志导入计算机便于管理，打印。
计算机管理	能够实现计算机对消磁过程的全面管理，通过授权身份登录管理界面进行记录消磁操作员、监消员、介质类型、销毁时间、所属部门、消磁电压、消磁场强、消磁结果等。
监控手段（场强监控仪）	有
监控手段（电压监控仪）	有
增压补偿装置	有
封闭磁场	设备消磁线圈四周，包括腔口处都设置有双层磁屏蔽，防止磁场泄露。具备磁场泄漏防护，磁场屏蔽。（权威机购磁场检测报告）
电压波动	保证市电在不同季节、时间段出现电压波动情况下启动增压补偿，确保销毁工作保证完成。
电压要求	220V±20%；50Hz/60HZ
功 率	200W
重 量	28kg
设备体积	550×450×200(mm)

越都品牌 消磁机 YD-XCJ03

 		适用领域 ▶ 政府机关、保密系统 ▶ 涉密企业、军工单位 ▶ 银行、电信和保险业 ▶ 小、中、大型企业 ▶ 信息技术行业 ▶ 安全服务提供商 销毁种类 ▶ 各种容量硬盘 ▶ 各种规格软盘、磁带 ▶ 其他磁性存储介质	可选配置 ▶ 便携式手提箱 ▶ 条码扫描器 ▶ 标签打印机 可选配置说明和报价: 便携式手提箱 1500 元 佳博打印机 GP-3120TN 1 台 2500 元 扫描器 Honeywell MS7120 1 台 3500 元
			
 存有信息的磁力图 没有信息的磁力图 消磁后的磁力图 			消磁机价格：38500 元 整体价格：46000 元 (含所有可选配置)

技术参数:

可销毁介质	硬盘、软盘、磁带、磁卡、录像带等
消磁方法	电容放电
磁场强度	≥12000Gs
最大消磁能力	≤3TB
消磁时间	20 秒
销毁数量	台式机硬盘 2 块/次、笔记本硬盘 8 块/次
消磁腔口尺寸	W160×D270×H35mm（可直接放入带托架的大尺寸服务器硬盘）
功率/电压	200W/220V/50Hz
操作界面	触摸液晶显示屏
设备尺寸	W310×D460×H227mm
重量	18kg

越都磁性存储介质消磁机 YD-XCJ05

产品价格：32545 元

越都磁性存储介质消磁机 YD-XCJ05 是一款能够对硬磁盘、软磁盘和磁带等磁性存储介质进行消磁处理。设备配置液晶触控屏、可视化管理，可直连外设、集成数据管理功能，安全易用。设备具备高效率、低能耗、低噪音的特点，适合办公室、数据中心、区县级销毁中心等使用。



一、产品性能

(1) 运行环境

电压要求：220V(允许电压波动±5%)，50/60Hz

设备尺寸：460×430×210(mm)

设备重量：25Kg

(2) 产品性能

消磁介质类型：硬磁盘、软盘、磁带、磁卡等磁性存储介质

消磁时间：15-20 秒/次

消磁腔体尺寸：300*155*31 (mm)

充电电压：850V~860V (当充电不足时，机器报警)

消磁场强：有效消磁区最低场强高于 10000 (Oe)

单次销毁数量：可同时放置 2 块 3.5 英寸标准硬盘

显示方式：7 英寸液晶触控屏

设备噪音：正常运行时噪音≤70dB

设备功率：待机 5.5W 工作最大功率：250W

管理方式：设备自身集成数据化管理，可记录消磁介质的介质编号、操作人员、消磁状态、消磁电压、消磁场强、消磁时间等。支持管理员、操作员的权限管理及配置。支持 U 盘直插，可任意分时、分段导出完整消磁记录，记录格式为.xlsx。

电压监控：对消磁电压进行有效监控，使其满足消磁必须的电压，电压不足时能及时报警，确保消磁工作能有效完成。

场强监控：对磁场强度进行监控。场强不足时能及时报警，确保销毁工作能有效完成。

增压补压装置：保证市电在不同季节、时间段出现电压波动的情况下进行增加补偿，确保消磁工作能有效完成。

安全装置：支持自动安全放电功能；同时具有手动强制放电功能，如遇中途断电或元器件损坏设备无法放电时，可手动强制放电，确保操作人员安全。

瑞翔消磁销毁一体机 RX-DZ9000



一. 产品简介

瑞翔消磁粉碎一体机 RX-DZ9000 是一款连续消磁，高保密，高效率，高环保的多功能存储介质整体消磁销毁机，该设备能够对固态硬盘整体、机械硬盘整体、光盘、线路板、笔记本电脑、电脑主板、密码键盘等存储介质进行消磁与粉碎处理。

工作环境参数

- 环境温度 -10°C ~ 65°C
- 环境湿度 10% ~ 95%
- 电压要求 380V (允许电压波动±5%)，50/60Hz

设备参数

- 消磁销毁介质：机械硬盘
- 整体销毁介质：机械硬盘、固态硬盘、密码键盘，光盘、线路板、笔记本电脑、电脑主板、密码键盘等存储介质
- 销毁速度：硬盘、ATM 机键盘 4 块/分钟
- 消磁速度：全系列机械硬盘及磁介质 10 块/分钟
- 消磁效果：大于 10000 (Oe) (可升级)
- 销毁效果：颗粒小于等于 20mm×40mm
- 内置扫码识别：消磁机内置扫码，支持扫描条形码
- 自身集成数据管理系统、支持消磁失败自动退回、支持外接扫码设备，
- 具备审计员的权限管理，支持管理员管理、支持场强监控。
- 显示/控制方式：7 英寸液晶触控屏，支持远程管理及控制
- 额定功率：4KW
- 设备重量：500Kg
- 设备噪音：正常运行时噪音≤75dB

规格：1200mmx600mmx1180m

越都磁性连续消磁机 YD-XCJ06



产品介绍

越都磁性连续消磁机 YD-XCJ06 是一款适合中型销毁中心内使用，低噪音、易清理、可灵活移动的消磁机，金属外壳、消磁效果好、性能稳定、配备安全识别及管理系统、自动和手动相结合工作模式，设备装有管控系统、介质识别系统、过热报警提示和急停装置等。消磁达到一级销磁标准要求。

越都连续消磁机参数

- (1) 可销毁介质：机械硬盘、录像带、磁带、磁卡、等磁性存储介质数据。
- (2) 销毁效果：有效消磁区最低场强高于 10000(0e)以上。
- (3) ★工作方式：传送带方式对磁性存储介质进行连续消磁工作。
- (4) ★消磁时间：每块硬盘≤6 秒，每小时消磁 600 - 720 块硬盘。
- (5) ★连续工作时间：2 小时。

价格：19.8 万元

一、设备描述

瑞翔消磁粉碎一体机 RX-DIC818 是一款能够对磁介质消磁；光介质及固态硬盘、电路板、芯片、内存条等半导体介质进行一级销毁处理。该设备符合 BMB21-2019《涉及国家秘密的载体销毁与信息消除安全保密要求》中磁介质消磁一级销毁技术要求、CD 光盘和半导体存储芯片一级销毁技术要求。设备具备低能耗、低噪音的特点，适合办公室、数据中心、销毁中心使用。



光盘销毁效果

电路板销毁效果



二、产品功能特点

消磁时间：15-20 秒/次

消磁腔体尺寸：300*155*31（mm）

管控系统

设备自身集成数据化管理，无需另配管理 PC。可记录消磁介质的介质编号、操作人员、消磁状态、消磁电压、消磁场强、消磁时间、消磁次数等。支持管理员、操作员的权限管理及配置。支持 U 盘直插，可任意分时、分段导出完整消磁销毁记录，记录格式为.xlsx。

多功能销毁

产品能够对固态硬盘、电路板、光盘、U 盘、芯片、IC 卡等各种电子产品的信息存储关键部件进行粉碎加研磨的高保密处理。

粉碎加研磨，销毁更彻底

涉密介质依次经过粉碎和研磨，最终介质研磨颗粒外形尺寸：芯片颗粒直径 $\leq 0.12\text{mm}$ CD 光盘颗粒直径 $\leq 0.65\text{mm}$ 。

简单的操作体验

设备面板设计简洁，操作标识醒目。设备大屏幕液晶显示，便于用户随时观察设备运行状态。

采用工业型带水平调节地脚的高强度优质万向轮，使设备安放平稳，搬运方便。

● 专业的操作安全和机芯免维护设计

设备料口距离机芯 100mm 以上，确保投料时安全；电路板设计配置过流保护和接地保护功能，强弱电分开，确保操作安全。

设备采用全新开发的介质粉碎机芯，内部单独设计防止卡机机构，保证设备使用时不卡机，实现了机芯完全免清扫和维护。

● 便捷而又安全的废料管理

设备料箱门带有电子锁，可由专人对废料进行管理，保证销毁过程的安全。

采用创新型的标准布袋集尘式废料收集，使废料收集更加便捷、环保，保证操作过程中不会有粉尘泄漏，保证使用环境的环境的干净，整洁。

产品性能指标

特征	序号	主要技术参数及功能要求
硬件要求 (消磁部分)	1	单次最大销毁能力：不小于 4T
	2	有效消磁区最低场强高于 10000 (Gs)
	3	消磁时间：15-20S/次
	4	消磁能力：≥2 块/次（3.5 寸硬盘或者带支架服务器硬盘）
	5	电压：220VAC（波动±10%）/50Hz
功能要求 (消磁部分)	1	消磁介质类型：硬磁盘、磁带、磁卡、软盘等磁性存储介质。
	2	电压监控：对消磁电压进行有效监控，使其满足消磁必须的电压，电压不足时能及时报警，确保销毁工作能有效完成。
	3	场强监控：对磁场强度进行监控。场强不足时能及时报警，确保销毁工作能有效完成。
	4	增压补压装置：保证市电在不同季节、时间段出现电压波动的情况下进行增加补偿，确保销毁工作能有效完成。
	5	安全装置：支持自动安全放电；设置强制放电按钮，遇中途断电或元器件损坏设备无法放电时，可手动强制放电。
	6	管理方式：设备自身集成数据化管理，无需另配管理 PC。可记录消磁介质的介质编号、操作人员、消磁状态、消磁电压、消磁场强、消磁时间、消磁次数等。支持管理员、操作员的权限管理及配置。支持 U 盘直插，可任意分时、分段导出完整消磁记录，记录格式为.xlsx。
	7	标配一把扫描枪，快速连扫，支持条形码扫描。
	8	显示方式：7 英寸液晶触控屏
硬件要求 (粉碎部分)	1	销毁效果：芯片颗粒直径≤0.12mm CD 光盘颗粒直径≤0.65mm
	2	销毁速度：≥6 块固态硬盘存储部件/分钟
	3	工作噪音：≤77 分贝
	4	工作电压：220VAC（波动±5%）/50Hz
	5	额定功率：7KW
	6	连续工作时间：≥4 小时
功能要求 (粉碎部分)	1	销毁介质：固态硬盘存储部件、U 盘、IC 卡、手机卡、电路板、半导体存储芯片等。
	2	投料口尺寸：125*5mm(板卡投料口)
	3	废料箱容积：50L
	4	状态指示：电源、开门、卡料、过热和投料等状态指示

	5	警告方式：指示灯、声音或显示屏报警
	6	料满告警：废料箱满时系统告警
	7	过热保护：机器在常温下连续工作一定时间后机器停止工作，机器进入过热保护状态。
	8	过载保护：具有过载保护功能，确保机器稳定工作并延长了使用寿命。
	9	安全保护：开门自动断电。打开机器门，点按机器任何按键，机器均不能启动工作，确保操作人员和维修人员的安全。
	10	防尘保护：全封闭粉碎出料通道设计，整个粉碎过程中无粉尘、有害气体等污染物泄露，无需外界吸尘设备。
	11	安全标识：应在进料口、废料箱等处粘贴醒目安全警示标识。
	12	设备体积： 1300×550×1080（mm）

6. 粉碎系统（Shredding System Solutions）

集成式系统粉碎、收集与打包解决方案，涵盖“上料—初级粉碎—二次精细粉碎—除尘—物料收集—打包”完整处理流程。

书本粉碎打包一体机

高效处理成册文件和档案资料，集粉碎与压缩打包于一体。

适用于要求 粉碎 + 打包一起使用的政府用户 产品选型表： 畅销产品型号： YD-5001 YD-4001

6. Shredding System Solutions

Integrated system solutions for shredding, collection, and baling, covering the complete process of feeding, primary shredding, secondary shredding, dust removal, material collection, and baling.

Book Shredding & Baling Systems

Efficient destruction and compaction of bound books and archives.

Quick Selection 快速选型

Front View

OVERALL

ID Model

YouTube

Price(USD)

Book Shredding & Baling Systems



5001



5002

Banknote Shredding & Compaction Systems



BM3002P-9075

Three-in-One Secure Destruction Systems (1mm Shredding + Hard Drive Crushing + Degaussing)



PZ3020



1mm Ultra-Fine Powder Destruction Systems



YTJ300BM1



BM6002



BM6002P

 4001 和 5001
碎纸

111

11

1

11



货币粉碎压块一体机

专为纸币、现金的保密粉碎及减容处理设计，确保销毁安全可靠。

适用于银行钞票粉碎压块 产品选型表： 畅销产品型号： BM3002P-9075

Banknote Shredding & Compaction Systems

Secure shredding and volume reduction of currency and banknotes.

YD-BM3002P-9075 | Banknote Destruction Machine

Paper Shredder with Integrated Baler and Compactor

YUEDU Brand | Model: BM3002P-9075

Banknote Destruction Machine	Integrated Baler and Compactor	Output
		Attachment: Sample Display 附件：样品展示 1mm powder - 1mm 粉末状   Compressed paper powder block - 纸粉压块   Compressed Money (RMB) block - 金钱（人民币）压块  

Shredder Specifications:

- Single Feed Capacity: 100 sheets; Hourly Shredding Capacity: 100-150KG/H
- Feed Width: 420mm
- Power: 22KW
- Dimensions: 3380*1440*2220mm

Shredding Process:

- Two-stage shredding with dual blade sets.
- Dimensions: 1480*1440*1850mm
- **Output:** 3mm particles: 100-150KG/H; 1mm particles: 75KG/H

Compacting Process:

- Compressed block diameter: 90mm*40mm; Compacting output: 75KG/H
- Dimensions: 1900*1400*2220mm

User Case: Banknote Shredder and Compactor Combo Machine				
Overall Image	Compactor Section	Output	 YouTube YouTube video https://youtu.be/OnOKqf-vkCA https://youtube.com/shorts/5-dmXbM1Wpw	 bilibili video https://b23.tv/Go7TGFH https://b23.tv/ToFqYLG
				

- **Retail Price:** ¥650,000 RMB (89,050.65 USD)
- **Agent Price:** ¥450,000 RMB (61,650.45 USD)

Compactor Selection Table | 纸张粉碎机配套压块机选型表

	Plan 1 方案 1	Plan 2 方案 2
Model	YKJ90-75	YKJ90-250
Image 压块机主机图		
Features 特点	Output Ports: 1 Hourly Capacity: 75 kg/hour 1个出料口 每小时产量75KG	Output Ports: 2 Hourly Capacity: 250 kg/hour 2个出料口 每小时产量250KG
Specifications 参数	Compaction Diameter: 90mm Compactor Output: 75 kg/hour Motor Power: 11kW Machine Weight: 1000kg Dimensions: 1700mm x 2300mm x 1400mm 压块直径: 90mm 产量: 75kg/H 马达功率: 11kw 机器重量: 1000kg 外形尺寸:1700*2300*1400	Compaction Diameter: 90mm Compactor Output: 250 kg/hour Motor Power: 45kW Machine Weight: 2200kg Dimensions: 2700mm x 2300mm x 1400mm 压块直径: 90mm 产量: 250kg/H 马达功率: 45kw 机器重量: 2200kg 外形尺寸:2700*2300*1400
Delivery (Working)	30-45	30-45
Price RMB	25 万元	65 万元
Price-Agent RMB	17.5 万元	45.5 万元
Pricing USD Retail 美元零售	34,257 USD	89,055 USD
Pricing USD Agent 美元代理价	23,977 USD	62,337 USD

三合一粉碎系统：1mm 粉碎+硬盘销毁+消磁 一体机

一站式销毁解决方案，涵盖纸质文件、电子存储介质与磁性介质的全面销毁需求。


产品选型表： 畅销产品型号： YD-PZ3020 **YD-PZ6030**

Three-in-One Secure Destruction Systems (*1mm Shredding + Hard Drive Crushing + Degaussing*)

Comprehensive destruction of documents, digital storage devices, and magnetic media.

YD-PZ 系列 | 三合一保密销毁系统

✅ 一站式销毁解决方案：📖 书本粉碎 + 💿 硬盘销毁 + 🧲 磁场消磁

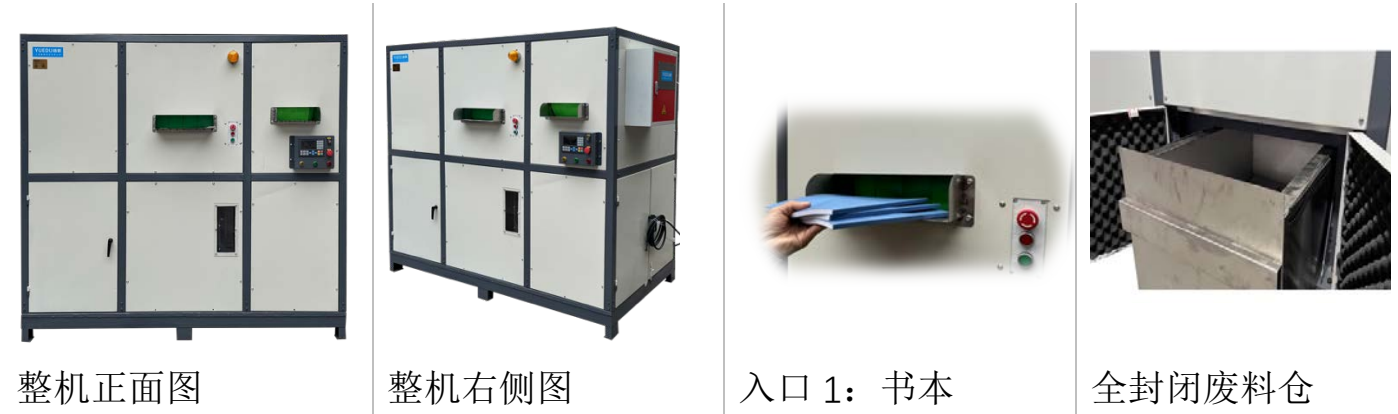

🏆 二十年的设计卓越 | 创新的客户应用与全球独创技术

YD-PZ 系列产品凝聚了上海越都科技在粉碎与保密领域二十年的技术经验。

✅ 核心优势与技术特点

- 符合保密销毁的要求：纸张 1mm 粉末状
- 处理极限材料：超厚、超硬材料的粉碎和销毁，如：硬盘、硒鼓、不锈钢。
- 适应低熔点材料：采用新材料制作的信息存储介质销毁。
- 符合 EHS 标准：符合跨国企业的环境、健康与安全标准。
- 高效低耗：节省成本，提供卓越性能。
- 兼容玻纤和矿物材料：专为坚硬、磨蚀性物质设计。

🌐 行业领军者的首选

广泛应用于各类单位的信息安全销毁需求，是众多世界 500 强企业优先采购的保密销毁设备。

🔧 技术参数：

产品型号	YD- PZ3020	YD- PZ3025	YD- PZ4025	YD-PZ5030	YD-PZ6030
碎纸张入口	300*130 mm	300*130 mm	400*200 mm	500*300 mm	600*500 mm
碎纸颗粒 ²³	1*2mm	1*2mm	1*2mm	1*2mm	1*2mm
碎纸张数 ²⁴	80-130 张	100-150 张	150-200 张	200-300 张	300-500 张
碎硬盘入口	20cm	25cm	25cm	30cm	30cm
消磁(磁场强度)	≥12000Gs	≥12000Gs	≥12000Gs	≥12000Gs	≥12000Gs
整机功率	8.2KW, 380V	11.5KW, 380V	13.5kw, 380V	19KW, 380V	26.5KW, 380V
整机尺寸	1.8*1.2*1.8m	1.8*1.2*1.8m	2*1.2*1.8m	2.2*1.2*1.8m	2.2*1.2*1.8m
整机重量	950KG	1100KG	1200KG	1300KG	1500KG
产品价格	19.8769 万元	25 万元	29.971 万元	39.7595 万元	49.9791 万元

²³ 可定制尺寸：提供 2 毫米、3 毫米和 5 毫米规格。若需其他选项，请联系我们。
²⁴ 长期运行：请均匀投料，并在粉碎室内材料完全处理后再加入新的材料。对于连续投料，每批次的投料量不得超过表格中规定值的三分之一。

第 93 页

YD-PZ Series | Three-in-One Secure Destruction System

✔ One-Stop Destruction Solution | 📖 Books + 💿 Hard Drives + 🌀 Magnetic Degaussing



🌐 20 Years of Engineering Excellence | Innovative Customer-Centric Design & Proprietary Global Technology

The YD-PZ Series is the result of two decades of expertise in shredding and secure destruction. It is designed to meet the evolving needs of **high-security document and media disposal**.

✔ Key Features & Technical Advantages

- **Meets top-tier confidentiality standards:**
Shreds paper into **1mm micro-powder**.
- **Handles extreme materials:**
Capable of destroying **ultra-thick and ultra-hard media**, including hard drives, toner cartridges, and stainless steel components.
- **Compatible with low melting point materials:**
Suitable for destroying modern storage media made with **heat-sensitive new materials**.
- **EHS-Compliant:**
Fully aligned with **global Environmental, Health, and Safety standards**, trusted by multinational corporations.
- **Energy-efficient performance:**
Reducing operational costs while maintaining performance.
- **Supports abrasive and composite materials:**
Specially designed to process **glass fiber, mineral-based, and high-wear materials**.

🔧 Technical Specifications:

Product Model	YD- PZ3020	YD- PZ3025	YD- PZ4025	YD-PZ5030	YD-PZ6030
Inlet Dimensions (mm)	300*130	300*130	400*200	500*300	600*500
Shred Size ²⁵	1*2mm	1*2mm	1*2mm	1*2mm	1*2mm
Sheet Capacity ²⁶	80-130	100-150	150-200	200-300	300-500
Magnetic Field Strength	≥12000Gs	≥12000Gs	≥12000Gs	≥12000Gs	≥12000Gs
Motor Power	8.2KW, 380V	11.5KW, 380V	13.5kw, 380V	19KW, 380V	26.5KW, 380V
Dimensions (m)	1.8*1.2*1.8m	1.8*1.2*1.8m	2*1.2*1.8m	2.2*1.2*1.8m	2.2*1.2*1.8m
Weight (kg)	950KG	1100KG	1200KG	1300KG	1500KG
Pricing RMB	¥198769	¥250000	¥299710	¥397595	¥499791
Pricing USD	\$27,996	\$35,212	\$42,212	\$55,999	\$70,395


²⁵ Customizable Sizes: Available in 1mm, 3mm, and 5mm specifications. For additional options, please contact customer service.
²⁶ For Long-Term Operation: Feed materials evenly and wait until the materials in the shredding chamber are fully processed before adding more. For continuous feeding, ensure each batch is no more than one-third of the value specified in the table.

1mm 粉末状销毁系统 1mm Ultra-Fine Powder Destruction Systems

Designed for ultra-high-security destruction requirements, producing powder-like final output.

针对超高保密需求设计，粉碎后输出呈现 1*1mm 粉末状，信息彻底不可恢复。

Applicable Scenarios: **Classified Destruction Center**, Centralized confidential destruction – v11

	Plan 1: YD-YTJ400BM1 YD-YTJ500BM1 YD-YTJ600BM1	Plan 2: YD-BM4001	Plan 3 : YD-BM4002	Plan 4 : YD-BM6001	Plan 5 : YD-BM6002
Pricing USD	300BM1, 17,143 400BM1, 21,150 500BM1, 25,380 600BM1, 29,610	21,150	63,450	54,990	70,500
Entry Image					
Full Machine Image					
Crushing efficiency²⁷	35 / 40 / 45KG/H Adjustable, see footnote 1 for details	100KG/H	60KG/H	50KG/H	80KG/H
Shredded Size²⁸	1*1mm Adjustable, e.g. 2/5mm etc.	1*1mm	1*1mm	1*1mm	1*1mm
Sheets Shredded	100-300 sheets	300-500 sheets	200-300 sheets	300-500 sheets	300-500 sheets
Entry Size	40/ 50 / 60 CM	60CM	40CM	60CM	60CM
Applicable Scenarios	County-level units	Provincial and municipal units	Provincial and municipal	County-level	Provincial and municipal units
YouTube	https://youtu.be/q9DufTdZl	https://youtu.be/RU7OpMikUoc	https://youtube.com/s_horts/KMaiAuUlj0s	https://youtu.be/i_cCRB-VJRw	https://youtu.be/v419WXU13oc
京东					

²⁷ It is the output of 1mm powder; The size of the crushing can be adjusted, and the crushing efficiency is related to the size of the crushing (the larger the size of the crushing, the greater the output of the discharge). For example, the grinding efficiency of 2 mm is about twice the grinding output of 1 mm. 表格中数字为 1mm 粉末状的产量; 粉碎的尺寸可以调整, 粉碎效率与粉碎的尺寸有关 (粉碎出来的尺寸越大, 出料产量也越大)。比如: 粉碎为 2mm 的粉碎效率, 约为 1mm 的粉碎产量的 2 倍。


²⁸ Adjustable, e.g. 2 / 5 / 8 / 15 mm etc. It can be customized and developed according to special use needs. 粉碎尺寸可调, 例如: 2/5/8/15mm 等; 可根据特殊的使用需求进行定制开发。

Attachment: Sample Display | 附件: 样品展示

1mm powder - 1mm 粉末状



Compressed paper powder block - 纸粉压块



Compressed Money (RMB) block - 金钱（人民币）压块



YD-YTJ600BM1 系列选型表

Product Overview 产品概览

**用户现场**
On-Site Usage

**粉碎效果**
Shredding Result





✂ Shreddable Materials 可以粉碎的物品

书本、纸张；光盘；卡；手机芯片；
PVC 宣传板，塑料宣传板、KT 板材、学校和单位活动展板；
其它类纸张纤维材质介质；其它类塑料材质介质

🔧 Technical Specifications 主要参数

ID 型号	YD-YTJ600BM1	YD-YTJ500BM1	YD-YTJ400BM1	YD-YTJ300BM1
📄进纸宽度	60CM 宽度、38CM 高度	50CM 宽度、30CM 高度	40CM 宽度、26CM 高度	30CM 宽度、22CM 高度
✂碎后尺寸	1*1mm 粉末状，可调整粉碎尺寸为 1*2mm, 8mm, 3mm 等			
📄碎纸能力	300-500 张	200-300 张	100-200 张	80-130 张
⚡额定功率	19.12KW, 三相 380V	15KW, 三相 380V	10KW, 三相 380V	7.5KW, 三相 380V
💰价格(¥)	21 万元	18 万元	15 万元	12 万元

+ Custom Case 定制方案



YD-YTJ600BM1 500 400 300

Product Overview

On-Site Usage



Shredding Result



Shreddable Materials

Books and paper documents, CDs/DVDs

Cards and chip-based items (e.g. SIM cards, mobile chips)

PVC advertising boards, plastic display panels, KT boards, school and institutional event panels

Other paper- or fiber-based media

Other plastic-based materials

Technical Specifications

Model	YD-YTJ600BM1	YD-YTJ500BM1	YD-YTJ400BM1	YD-YTJ300BM1
Feed Width	60CM*38CM	50CM*30CM	40CM*26CM	30CM*22CM
Cut Size	1*1mm 粉末状, 可调整粉碎尺寸为 1*2mm, 8mm, 3mm 等			
Max Sheets	300-500	200-300	100-200	80-130
Power	19.12KW, 3 phase 380V	15KW, 3 phase 380V	10KW, 3 phase 380V	7.5KW, 3 phase 380V
Price (USD)	29,610	21,150	21,150	17,143

+ Custom Case





1mm powder - 1mm 粉末状



Shredder Specifications:

- Single Feed Capacity: 100 sheets; Hourly Shredding Capacity: 100-150KG/H
- **Output:** 3mm particles: 100-150KG/H; 1mm particles: 75KG/H

YouTube <https://www.youtube.com/watch?v=Kc4YdBsiQKo>

+ Custom Case 定制案例

Banknote Destruction Machine



Integrated Baler and Compactor



Output



YouTube Video1: <https://youtu.be/OnOKqf-vkCA> Video2: <https://youtube.com/shorts/5-dmXbM1Wpw>

越都 YD-BM6002 机型（1*1mm 粉末状）

适合场景 绝密销毁，保密1级销毁室，集中大批量粉碎涉密书本资料

案例：
某战区 保密室、某政府涉密销毁车间、某企业保密销毁中心

推荐原因	A 保密程度高，可达到 1*1mm 粉末状（棉絮状） B 粉碎效率高，速度快，有效的粉碎涉密单位的大量保密介质材料 C 可调整粉碎尺寸，适合多种销毁工况 D 可粉碎多种涉密介质，性价比高
型号	YD-BM6002
价格	49.7731 元
视频链接	【书本纸张絮状粉末效果：越都保密涉密销毁系统 1mm 粉末状效果】 https://b23.tv/Qqb6qwC
入口	1 个
入口尺寸	60CM 宽度、28CM 高度
粉碎形状	1*2mm 粉末状，80-100kg/hour 4~5mm 粉末状，500 – 650kg/hour 8mm 粉末状，1200-1600kg/hour 粉碎尺寸可调整
每次碎纸	300-500 张
电压	380V
功率	27KW
可碎材料	光盘介质、卡片、芯片、存储介质、线路板、半导体介质
整机图	
用户现场	


输送带进料。最小尺寸可以达到 1mm 粉末状。配套大吸力出料除尘系统，有效提升效率。

YD-BM6002P 粉碎系统

全功能粉碎、除尘、打包一体化系统

一次粉碎 + 二次粉碎 + 除尘 + 打包压块的一体化系统解决方案

产品概览 Product Overview

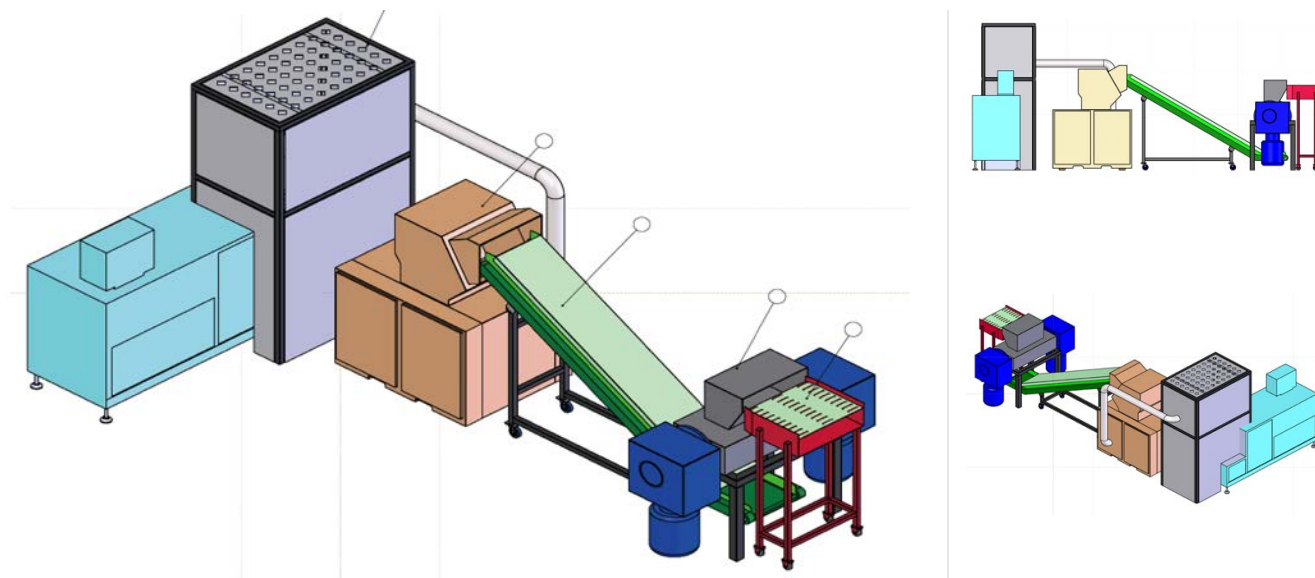

应用场景 Application Scenarios

  保密室 / Secure / Confidential Room


  保密销毁中心 / Secure Destruction Center

产品价格:

碎纸机部分 YD-BM6002 机型, 价格: 49.7731 万元

打包压块机 YD-DBJ6002P 机型, 价格: 49.75 万元

整体方案三视图:

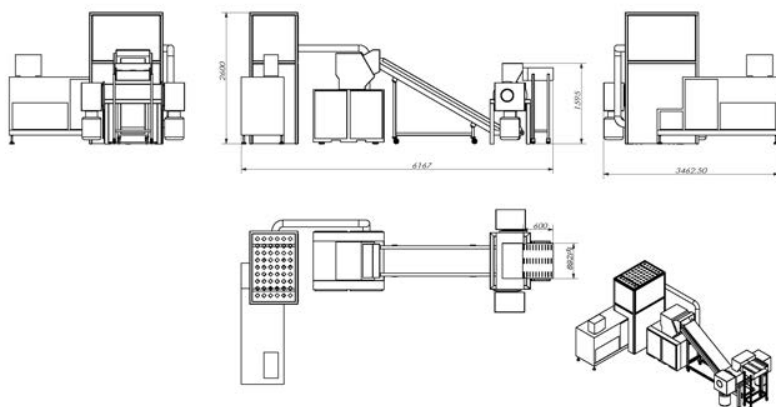



注: 以上方案仅供参考, 以用户要求的实际交付为准。

YD-BM6002P Integrated Shredding System

All-in-One Shredding, Dust Collection & Baling System

Integrated system solutions for shredding, secondary processing, dust removal, and baling.

Product Overview

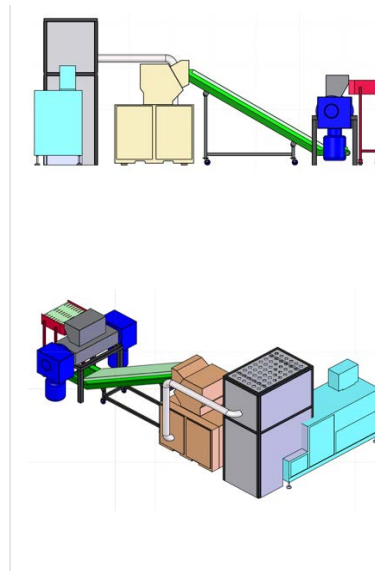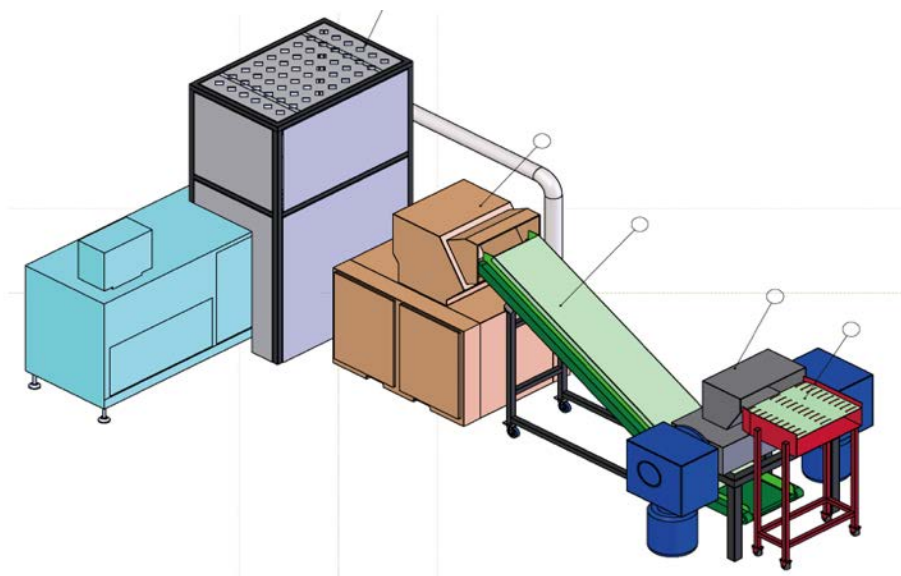

Application Scenarios

 Secure / Confidential Room

 Secure Destruction Center


Product Pricing:

Shredder Unit - Model: YD-BM6002 → ¥497,731

Baler & Compactor Unit - Model: YD-DBJ6002P → ¥497,500

System Overview: Three-View Diagram

(Front / Side / Top Views of the Integrated System)

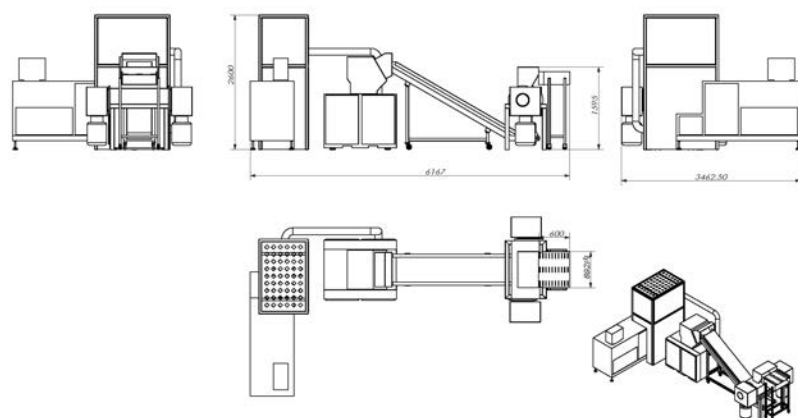

 Note: The above solution is for reference only. Final delivery is subject to the user's confirmed requirements.

7. Honeycomb Paper Expander Series

Designed for converting waste cardboard boxes and kraft paper into eco-friendly cushioning materials, ideal for applications in e-commerce, export packaging, and logistics cushioning.

7. 膨切机产品线（Honeycomb Paper Expander Series）

用于废纸箱、牛皮纸转化为环保缓冲材料，应用于电商、出口包装、物流缓冲填充场景

Quick Selection 快速选型

 Front View 外观	 OVERALL	 Model 型号	 Feed 宽度	 YouTube	 Price 价格
		YD-PQJ320W	255mm		RMB 13,900 USD
		YD-PQJ325W	325mm		RMB 17,500
		YD-PQJ4250W	425 mm		RMB 29,700
		YD-PQJ500W	500 mm		RMB 37,500
		YD-PQJFW500	510 mm		RMB 250,000

YD-PQJ500W YD-PQJ425W YD-PQJ325W YD-PQJ320W

Product Overview 产品概览



Model: YD-PQJ500W



Model: YD-PQJ425W



Model: YD-PQJ325W



Model: YD-PQJ320W

Application Scenarios 应用场景



Fig. 1 OPEN INLET



Fig. 2 REAR VIEW




Fig. 3 EMERSON – CUSTOM



Fig. 4 ROYAL PET – CUSTOM

Shreddable Materials 可以粉碎的物品



Technical Specifications 主要参数

Item No	YD-PQJ500W	YD-PQJ425W	YD-PQJ325W	YD-PQJ320W
Feed Width	500mm	425mm	325mm	255mm
Feed Height	20mm	20mm	14mm	8mm
Packing Mat Grid	5*80mm or 5mm Strip cut	5*100mm or 5mm Strip cut	5*60mm or 5mm Strip cut	3*45mm or 3mm Strip cut
Packing Mat Grid	5-7 ply Box or 40-70 paper A4/70g	5-7 ply Box or 40-70 paper A4/70g	3-5 ply Box or 30-40 paper A4/70g	3-5 ply Box
Power Supply	220V/50Hz	380V/50Hz	220V /50Hz	220V/50Hz
Motor Power	2.6KW	2.8KW	1.8KW	100W
Net Weight	145Kg	164Kg	88Kg	30KG
Dimension(mm)	W723*D702*H1035	W700*D680*H970	W500*D355*H800	W387*D316*H255
RMB Pricing (Inc. CN Tax 13%)	29900 / 37500(inc. vacuum cleaner)	29700	17500	13900

 YD-PQJ500W inc. vacuum cleaner

 Product Overview 产品概览



 On-Site User Video YD-PQJ500W | 工作视频（客户现场）

On-Site 1	On-Site 2	YouTube	Bilibili
		1 Cardboard Perforator YUEDU YD-PQJ500W https://youtube.com/shorts/JovtVlr5rUs	【越都 YD-PQJ500W 膨切机】 https://b23.tv/1wB9NqZ
		2 Customized Shredding Solution https://youtube.com/shorts/rYT4tzDDXH0	【纸板的网状蓬松效果】 https://b23.tv/lvtnkKu
		3 cardboard perforator YUEDU https://youtube.com/shorts/CjXOfb08rH4	【越都助力跨国公司仓库运营】 https://b23.tv/gjTbFyN

 Technical Specifications 主要参数

Model: YD-PQJ500W	型号: YD-PQJ500W
Specifications: - Input Width: 500mm - Input Thickness: 20mm - Shredding Output Size: 5×76mm grid - Feeding Speed: 15 meters per minute	产品参数: 入口宽度: 500mm, 入口厚度 20mm 粉碎后尺寸: 5*76mm 网格状 进料速度: 15 米每分钟
Main Shredding Unit: - Power: 2600W - Voltage: 100-115V or 220-240V - Net Weight: 145kg - Gross Weight: 170kg	YD-PQJ500W 粉碎主机部分: 功率: 2600W 电压: 100-115V 或 220-240V 净重 145KG , 毛重 170KG
Optional Dust Removal System: - Power: 750W/220V - Air Volume: 1500M³/H, Air Speed: 35M/S - Dimensions: 0.8×0.4×1.5M - Weight: 23kg	除尘系统部分参数（可选配置）: 功率 750W/220V 风量 1500M³/H, 风速 35M/S 尺寸 0.8*0.4*1.5M 重量 23KG
Total Power: 3350W, Single Phase, 220V (Optionally available in 110V) Total Weight excluding dust removal system: 165kg (including shredding unit and export packaging) Total Weight with Dust Removal System: 188kg (Including main unit, dust removal system, and export packaging)	总功率: 3350W, 单向, 220V （可做 110v） 总重量: 165 kg （不含吸尘器、含主机、含出口包装） 总重量: 188 kg （含主机和吸尘器以及出口包装）
Overall Dimensions: W500×D355×H800mm (Including main unit, dust removal system, and export packaging)	外形尺寸: W500*D355*H800mm （含主机和吸尘器以及出口包装）

 YD-PQJFW500 | High-speed honeycomb paperboard die-cutting machine

 Convert Kraft Paper into Eco-Friendly Honeycomb Packaging

200m/min High-Speed Punching & Rewinding

Ideal for Logistics, E-Commerce & Sustainable Packing



 Key Advantages

-  **Auto-forming honeycomb mesh**
Built-in tension control for consistent output
-  **7” Touchscreen + PLC Control**
Simple interface and precise operation
-  **Seamless integration**
Compatible with packing lines & automation
-  **One-time investment**
Save long-term cost on plastic/foam fillers

 Product Specifications

Model	YD-PQJFW500
Material	Kraft Paper (60g–120g)
Speed	Up to 200 meters/min
Feeding Width	200–510mm
Motor Power Supply	5KW, 3-phase 380V 50Hz
Machine Size	1950×1314×1402mm
Machine Weight	1800KG

