

视频1: How to destroy old banknotes securely?

How to Destroy Old Banknotes Securely?

央行货币如何安全销毁?

第一类销毁方案: 粉碎压块一体机

第二类销毁方案: 1mm粉碎系统 (可选配粉碎后处理设备, 如 压块 打包等)

第三类销毁设备: 1~3mm粉碎方案, 价格2000美元起

(1/5) How to Destroy Old Banknotes Securely? | YUEDU Banknote Solutions

(2/5) Solution A – Integrated Shredding & Briquetting System | YUEDU

(3/5) Solution B – Ultra-Fine 1mm Shredding System | YUEDU

(4/5) Solution C – Cost-Effective 1–3mm Shredding Starting at \$2,000

(5/5) Complete Banknote Destruction Solutions – Contact YUEDU

(1/5) 央行货币如何安全销毁? | 三大方案总览

(2/5) 方案A: 粉碎压块一体机 | 中央银行首选

(3/5) 方案B: 1mm超细粉碎系统 | 高保密销毁

(4/5) 方案C: 经济型1~3mm粉碎方案 (起价\$2000)

(5/5) 三大方案总结 | 欢迎联系上海越都科技有限公司

视频2:

Solution A: Integrated Shredding & Briquetting System

方案A: 粉碎压块一体机

Solution A:

Ideal for central banks – dual-stage shredding and compacting in one machine.

适合中央银行——两级粉碎加压块, 一体化处理。

1. BM3002P-9075 – Banknote Shredding & Briquetting System

BM3002P-9075 型银行货币粉碎压块一体机

2. BM6002P – High-Capacity Dual-Stage System

BM6002P 型两级粉碎加压块高效系统

3. Models 5002 & 5001 – Shredding & Baling Combo

5002 和 5001 型粉碎打包一体机

视频3:

Solution B: Ultra-Fine 1mm Shredding System

方案B: 1mm粉碎系统（可选配后处理设备）

Solution B:

Achieve 1mm ultra-fine particles, optional baler or compactor for added security.

实现1mm超细粉末，可选配打包或压块设备。

4. 300BM1 – 600BM1 Series – 1mm Ultra-Fine Shredders

300BM1 – 600BM1 系列 – 1mm 超细粉碎机

5. Models 6002 & 4001 – Modular 1mm Shredding Solutions

6002 和 4001 型 – 模块化 1mm 粉碎系统

视频4:

Solution C: Cost-Effective 1–3mm Shredding – Starting at \$2,000

方案C: 经济型1~3mm粉碎方案，价格2000美元起

Affordable solution for smaller operations, secure shredding from 1 to 3mm.

适合少量粉碎需求银行，提供1~3mm安全粉碎。

6. QL300 – QL600 Series – Heavy-Duty Shredders

QL300 – QL600 系列 – 重型粉碎机

7. SL500 – SL700 Series – Silent High-Security Shredders

SL500 – SL700 系列 – 静音高保密碎纸机

视频 5: 总结 3 大类的银行钞票粉碎方案，欢迎大家与上海越都科技有限公司联系

关键词: *anknote destruction, cash recycling plant, old currency disposal*
central bank security, currency destruction system
ultra-fine shredding, 1mm particles, security shredding

(1/7) BM3002P-9075 Banknote Shredding & Briquetting System
Paper Shredder with Integrated Baler and Compactor
YUEDU Brand | Model: BM3002P-9075

Banknote Destruction Machine	Integrated Baler and Compactor	Output
		Attachment: Sample Display 附件: 样品展示 1mm powder - 1mm 粉末状   Compressed paper powder block - 纸粉压块   Compressed Money (RMB) block - 金钱 (人民币) 压块  

Shredder Specifications

- Single Feed Capacity: 100 sheets; Hourly Shredding Capacity: 100-150KG/H
- Feed Width: 420mm
- Power: 22KW
- Dimensions: 3380*1440*2220mm

Shredding Process:

- Two-stage shredding with dual blade sets.
- Dimensions: 1480*1440*1850mm
- **Output:** 3mm particles: 100-150KG/H; 1mm particles: 75KG/H

Compacting Process:

- Compressed block diameter: 90mm*40mm; Compacting output: 75KG/H
- Dimensions: 1900*1400*2220mm

User Case: Banknote Shredder and Compactor Combo Machine



Overall Image	Compactor Section	Output	 YouTube YouTube video https://youtu.be/OnOKqf-vkCA https://youtube.com/shorts/5-dmXbM1Wpw	 bilibili video https://b23.tv/Go7TGFH https://b23.tv/ToFqYLg
				

(2/7) YD-BM6002P Integrated Shredding System

All-in-One Shredding, Dust Collection & Baling System

Integrated system solutions for shredding, secondary processing, dust removal, and baling.

Product Overview

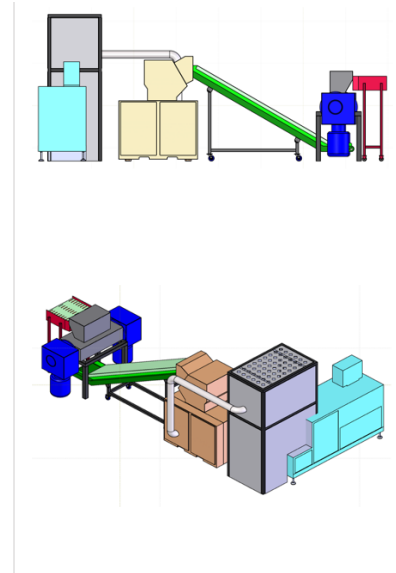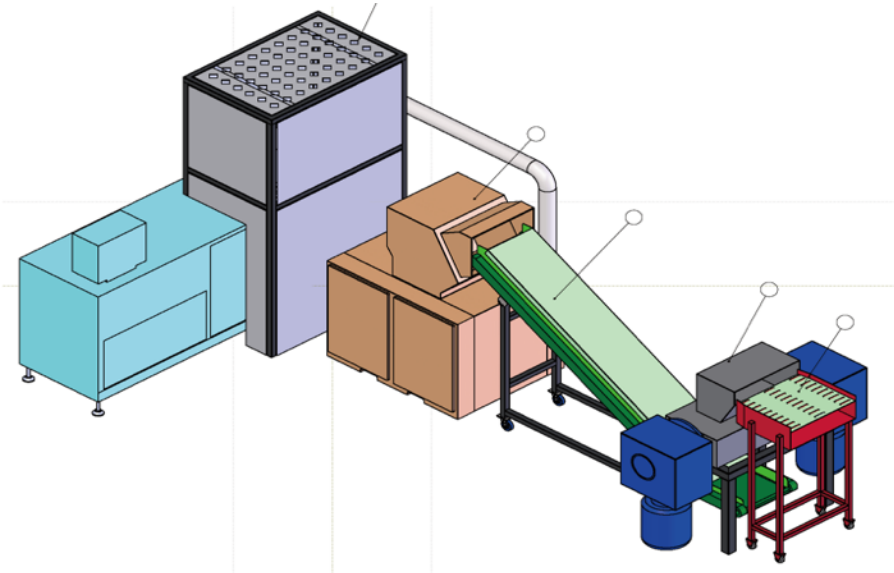

Application Scenarios

  Secure / Confidential Room

  Secure Destruction Center


Product Pricing:

Shredder Unit – Model: YD-BM6002 → ¥497,731

Baler & Compactor Unit – Model: YD-DBJ6002P → ¥497,500

System Overview: Three-View Diagram

(Front / Side / Top Views of the Integrated System)

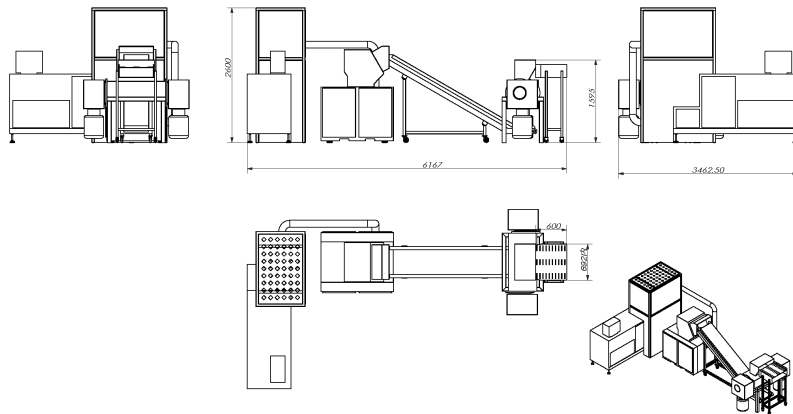

 Note: The above solution is for reference only. Final delivery is subject to the user's confirmed requirements.

(3/7) YD-5002 Book Shredding & Baling Systems

Product Overview



500CC shredder + 10T baler combo, ideal for secure rooms and archives.

Shreds up to 500 kg/h, compresses into 50–75 kg paper bales.

Technical Specifications:

 Output/h: 500–600 kg




 Bale Weight: 50–75 kg

 Baling Pressure: 85 kN

 Power: 11.5 kW, 3 phase 400 V / 50 HZ

 L×W×H (mm): 3257*2588*2284

 System Overview: Three-View Diagram

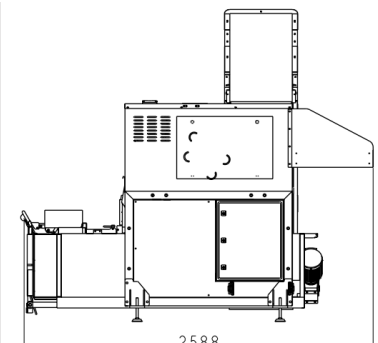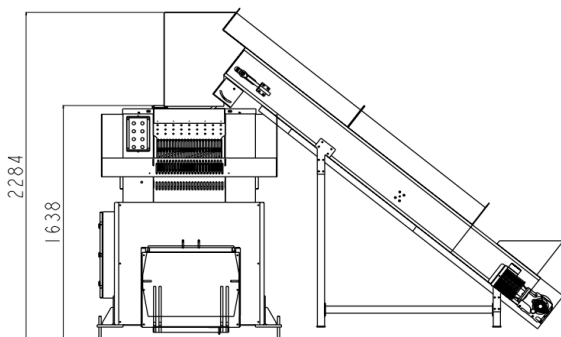

(4/7) YD-YTJ600BM1 500 400 300 – 1mm Ultra-Fine Shredders

Product Overview

On-Site Usage



Shredding Result



Shreddable Materials

Books and paper documents, CDs/DVDs

Cards and chip-based items (e.g. SIM cards, mobile chips)

PVC advertising boards, plastic display panels, KT boards, school and institutional event panels

Other paper- or fiber-based media

Other plastic-based materials

Technical Specifications

 Model	YD-YTJ600BM1	YD-YTJ500BM1	YD-YTJ400BM1	YD-YTJ300BM1
 Feed Width	60CM*38CM	50CM*30CM	40CM*26CM	30CM*22CM
 Cut Size	1*1mm 粉末状, 可调整粉碎尺寸为 1*2mm, 8mm, 3mm 等			
 Max Sheets	300-500	200-300	100-200	80-130
 Power	19.12KW, 3 phase 380V	15KW, 3 phase 380V	10KW, 3 phase 380V	7.5KW, 3 phase 380V
 Price (USD)	29,610	21,150	21,150	17,143

Custom Case



(5/7) YD-BM6002- Modular 1mm Shredding Solutions

 Product Overview 产品概览

越都 YD-BM6002 机型 (1*1mm 粉末状)

适合场景 绝密销毁, 保密1级销毁室, 集中大批量粉碎涉密书本资料

案例:

某战区 保密室、某政府涉密销毁车间、某企业保密销毁中心

推荐原因	A 保密程度高, 可达到 1*1mm 粉末状 (棉絮状) B 粉碎效率高, 速度快, 有效的粉碎涉密单位的大量保密介质材料 C 可调整粉碎尺寸, 适合多种销毁工况 D 可粉碎多种涉密介质, 性价比高
型号	YD-BM6002
价格	49.7731 元
视频链接	【书本纸张絮状粉末效果: 越都保密涉密销毁系统 1mm 粉末状效果】 https://b23.tv/Qqb6qwC
入口	1 个
入口尺寸	60CM 宽度、28CM 高度
粉碎形状	1*2mm 粉末状, 80-100kg/hour 4~5mm 粉末状, 500 - 650kg/hour 8mm 粉末状, 1200-1600kg/hour 粉碎尺寸可调整
每次碎纸	300-500 张
电压	380V
功率	27KW
可碎材料	光盘介质、卡片、芯片、存储介质、线路板、半导体介质

整机图

用户现场



输送带进料。最小尺寸可以达到 1mm 粉末状。配套大吸力出料除尘系统, 有效提升效率。

(5/7) YD-BM4001 – Modular 1mm Shredding Solutions



1mm powder - 1mm 粉末状



Shredder Specifications:

- Single Feed Capacity: 100 sheets; Hourly Shredding Capacity: 100-150KG/H
- **Output:** 3mm particles: 100-150KG/H; 1mm particles: 75KG/H

 **YouTube** <https://www.youtube.com/watch?v=Kc4YdBsiQKo>

+ Custom Case 定制案例

Banknote Destruction Machine



Integrated Baler and Compactor



Output



 **YouTube** Video1: <https://youtu.be/OnOKqf-vkCA> Video2: <https://youtube.com/shorts/5-dmXbM1Wpw>

(6/7) YD-FSJQL 系列 300-800 型漏斗大功率机型

产品概览 Product Overview

YD-FSJQL300



YD-FSJQL400



YD-FSJQL500



YD-FSJQL600



✓ 核心优势 Key Features

- 大马力
- 合金刀具

- 符合 EHS 标准：符合环境、健康与安全标准。
- 大块机头料粉碎

🔧 主要参数 Technical Specifications

产品型号	YD-FSJQL300	YD-FSJQL400	YD-FSJQL500	YD-FSJQL600	YD-FSJQL800
入口尺寸(mm)	310*260	410*260	510*260	610*310	810*410
碎纸张数 ¹	30-50 张	70-80 张	100-150 张	200-300 张	400-800 张
粉碎能力 ² (kg/h)	100-200	150-250	200-350	300-600	500-800
电机功率	5.5KW, 380V	7.5KW, 380V	11KW, 380V	15KW, 380V	30KW, 380V
出料 (可定制 ³)	8mm	8mm	8mm	8mm	8mm
产品尺寸 (m)	1.22x0.72x1.16	1.32x0.86x1.46	1.45x1.00x1.54	1.70x1.15x1.88	2.22x1.38x2.38
重量 (kg)	450	550	750	850	2000
产品售价 (含税)	15847	19781	23929	38423	79618

¹ 表格中粉碎张数为首次投料的张数，机器长期工作时，每次应均匀投料，待粉碎腔体中物料粉碎完毕后，再进行投料操作，如果连续投料，建议每次投料塑料为表格中数值的 1/3 以内。

² 该粉碎能力为最大值，比如粉碎硬质塑料类物料；如果粉碎纸张，粉碎能力会打折，粉碎产量与出料尺寸有关（粉碎尺寸越大，出料越快），如果粉碎纸张，建议粉碎为 3cm 尺寸速度较快，粉碎能力约为表格中最大粉碎数值的 1/3。

³ 可定制 3mm 5mm 8mm 15mm 18mm 25mm 28mm 等规格尺寸，出厂标配为 8mm 尺寸，更多信息详询公司客服。

(7/7) YD-SL500 | 600 | 700 Silent High-Power Shredder



Front View



Internal View



Safe Feeding Inlet



Fully Enclosed Waste Bin

Twenty Years of Design Expertise, Proven Client Applications, and Innovative Global Technologies

As a pioneering new product, it integrates two decades of engineering excellence, extensive client application cases, and globally innovative technology. Features include but are not limited to:

- **EHS-Compliant:** Fully aligned with global Environmental, Health, and Safety standards, trusted by multinational corporations.
- **High Efficiency, Low Energy Consumption:** Saves costs while delivering exceptional performance.
- **Zero Leakage:** No material leakage, no dust emissions, and no material return during operation.
- **Handles Extreme Materials:** Suitable for ultra-thick and super-hard materials.
- **Adaptable to Low-Melting Plastics and Rubber:** Ideal for processing heat-sensitive materials.
- **Compatible with Glass Fiber and Mineral Materials:** Designed for tough, abrasive substances.

Preferred by Industry Leaders

The first choice for multinational corporations, industry leaders, and Fortune Global 500 enterprises.

Technical Specifications:

Product Model	YD-SL500	YD-SL600	YD-SL700
Inlet Dimensions (mm)	400*250	500*260	600*300
Number of Sheets Shredded ⁴	150-250	300-500	400-600
Shredding Capacity ⁵	200-350 kg/h	300-600 kg/h	400-600kg/h
Motor Power	7.5KW, 380V	11KW, 380V	15kw, 380V
Shredded Size(Customizable) ⁶	8mm	8mm	8mm
Dimensions (mm)	1240*1000*1563	1395*1160*1689	1550*1230*2350
Weight (kg)	450	700	900
Pricing RMB	67669	82715	97761

⁴ For Long-Term Operation: Feed materials evenly and wait until the materials in the shredding chamber are fully processed before adding more. For continuous feeding, ensure each batch is no more than one-third of the value specified in the table.

⁵ Shredding Capacity: The listed capacity is the maximum, applicable to hard plastics. For materials like paper, the shredding capacity decreases and depends on the output size (larger sizes process faster). For shredding paper, a 3 cm output size is recommended for faster processing.

⁶ Customizable Sizes: Available in 1mm, 3mm, and 5mm specifications. For additional options, please contact customer service.